


Cue

Basin Mixer

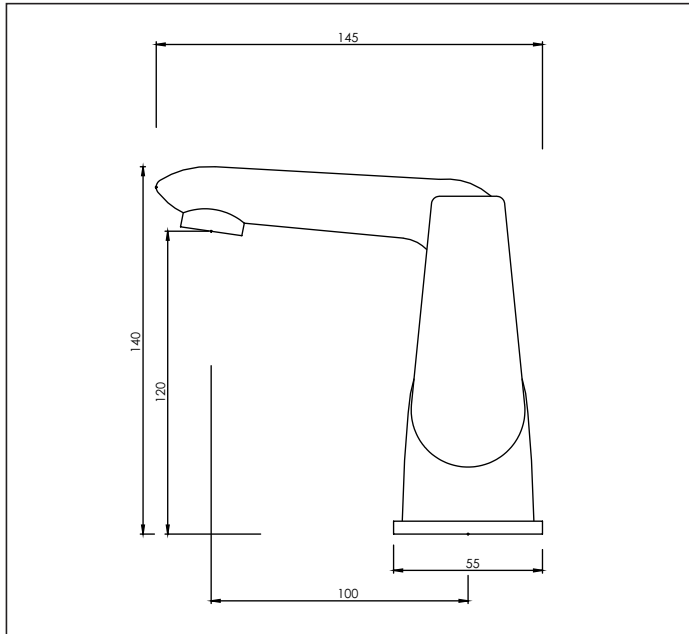

Code: CU BASM

Finish: Chrome

Spout: Fixed

Water outlet: M24 Ring with Flow Guide Fitted

Stainless Steel Inlet Hoses:

Hot: Size: M10 x 1/2" BSP

Cold: Size: M10 x 1/2" BSP

Base Ring supplied with custom seal

Mounting Hardware: Stud: 7mm
Nut: 11mm A/F
Horseshoe Washer

Installation Hole Diameter: Minimum: 30mm
Maximum: 34mm

Cartridge: Kerox 35mm Raised Base

Flow: Supplied flow guide fitted for max flow at low pressure
7 l/min PCA supplied for regulated flow with mains pressure system
Max Hot Flow: 6.35 l/min @ 35kPa

aquatica



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 20 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

