


Deluna

Bath Spout Wall-Mounted

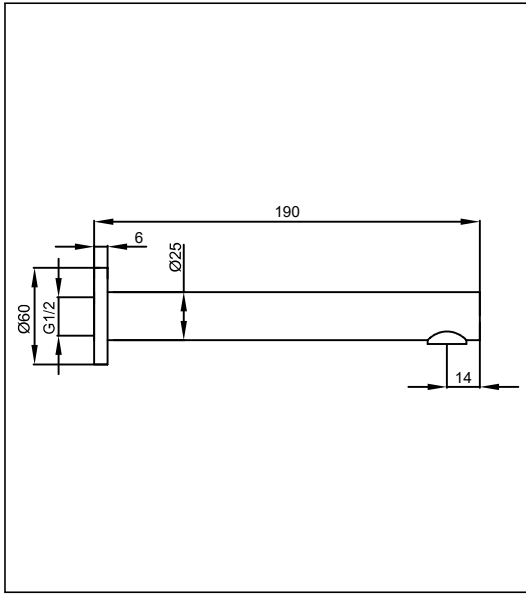

Code: DE BS CH | DE BS SS | DE BS BLK | DE BS GM
Finish: Chrome | Stainless Steel | Black | Gunmetal

Water Inlet: 1/2" BSP Female supplied with 1/2" BSP male brass pipe

Water Outlet: M18 ring with aerator fitted

Installation Hole Diameter:

Minimum: 21mm diameter

Total Length: 190mm

Flow: Max Hot Flow @ 35kPa = 13 ℓ/min or 5.3 ℓ/min with PCA

Faceplate: 60mm diameter

aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 35 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa