


Deluna

Floor Standing Bath Filler with Handshower

aquatica

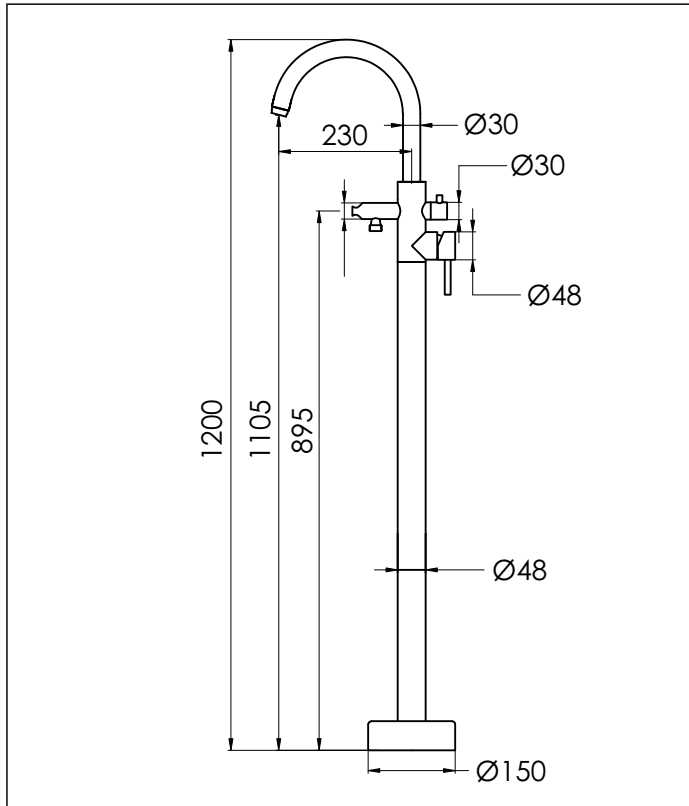

Code: DE BSETFLOOR

Finish: Brushed Stainless Steel

Spout: Swivel, 360°

Water Outlet: M27 Aerator

Water Inlets: 1/2" BSP female via stainless steel inlet hoses

Handshower Head: Single spray chrome

Handshower Hose: 1.5m Brushed stainless steel narrow bore hose

Mounting Hardware: Base bracket with 3 masonry bolts
(to be mounted below finished floor level)

Installation Hole: 110mm Diameter x 40mm depth minimum (Up to 60mm)

Cover: 150mm (Diameter) x 50mm (Height)

Reach: 230mm

Height: 1200 mm height from floor (1105 mm at aerator)

Divertor type: Handle to divert flow, Turn handle to divert to handshower

Cartridge: Multi port divertor 40mm flat base

Max water flow from bath filler: 4 l/min @35kPa

Flow Control: @ PCW 9 l/min (+-) 10% nominal flow from 100 kPa onwards

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation