Product

• Taut kitchen mixer



Included Components

• Braided stainless steel hoses

Features

- Polished chrome
- Metal construction
- Ceramic disc valve
- Suitable for mains pressure
- KOHLER finishes resist tarnishing and corrosion

Kohler Code

74053T-4E-CP




WELS RATING (5 Star 6 Litres / min)

Related Products

• Taut tapware

Technical Details

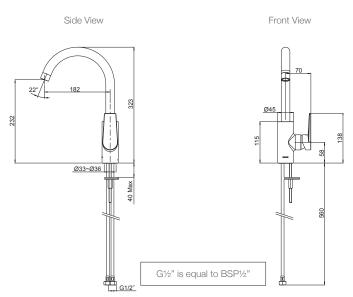

Installation Notes:

- G1/2" female inlets.
- Optimum working pressure 300-500 kPa.
- Maximum hydrostatic pressure 800kPa. (This pressure may be exceeded only under test conditions).
- Where normal working pressure exceeds the maximum, pressure limiting valves should be installed.
- Maximum working temperature 60°C.
- Maximum bench thickness is 40mm.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing.

Australia www.kohler.com.au New Zealand www.kohler.co.nz Sizes are approximate. All measurements shown are in millimetres. April 2018 1330649-A04-B

