



## APPLICATIONS



TOILET



HAND BASIN



BATH



SHOWER



WASHING MACHINE



DISH WASHER



KITCHEN SINK

# Sanicubic® 1 GR

Sanicubic® 1 GR is ideal for sloping waterfront properties where a boathouse could be converted to run amenities or rural properties where main drainage is too far away. It features a powerful 2200W motor, high flow rate performance, and an IP68 waterproof rating.



WMTS 106:2019  
Certificate No. 23048  
Manufacturer: SFA  
Brand: Saniflo

PRODUCT REFERENCE:  
SA300

## WHY CHOOSE THIS PRODUCT?

Compact dimensions

Tough, reliable macerating lifting station

Intelligent level controller

External hard wired audio visual alarm

Features integrated non-return valves

Will handle up to 55°C intermittent


IP68 rated

## TECHNICAL CHARACTERISTICS


<b>Discharge Pipework</b>	40 mm
<b>Motor Power</b>	2200 Watts
<b>Flow Rate</b>	17 m <sup>3</sup> /h
<b>Voltages</b>	220-240 V/50 Hz
<b>Tank Volume</b>	55 L
<b>Working Waste Water Temp</b>	55°C Max (intermittent)
<b>Product Weight</b>	64 kg
<b>Overall Measurements</b>	570 x 439 x 460 mm
<b>Inlet Pipework</b>	50/100 mm
<b>IP Rating</b>	IP68

## VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

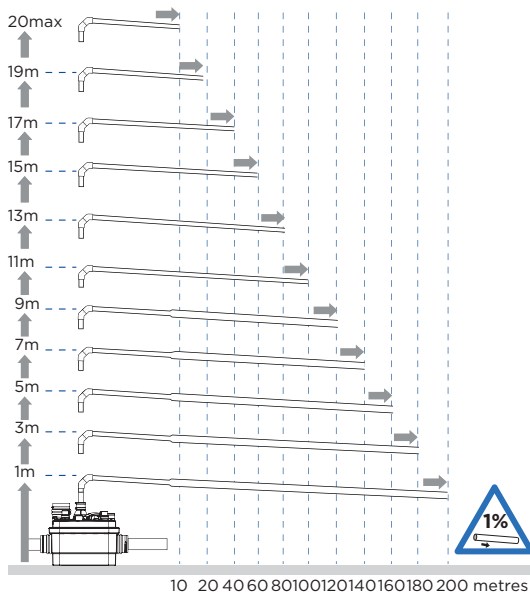

## FLOW RATE PERFORMANCE CHART

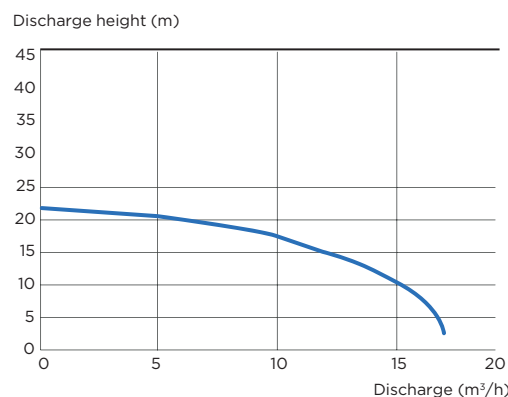

Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber



The controller system is operated via program settings which are displayed on the LCD screen. All settings are saved so that they are available when the control system is restarted. The display language can be changed. Besides the actual operational parameters, the controller system also saves the controlling process and records any irregularities which can be displayed on the LCD screen.

## APPLICATIONS



TOILET

HAND  
BASIN

BATH



SHOWER

WASHING  
MACHINEDISH  
WASHERKITCHEN  
SINK

WMTS 106:2019  
Certificate No. 23048  
Manufacturer: SFA  
Brand: Saniflo

PRODUCT REFERENCE:  
SA300

## CONTROLLER CHARACTERISTICS

Clear LCD display

Internal acoustic alarm



Programmable operation and fault signal

Maintenance interval counter



Recording of the fault protocol

Electronic monitoring of the motor current

Internal pressure sensor

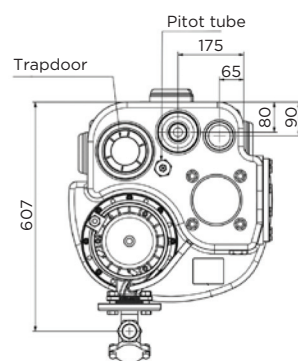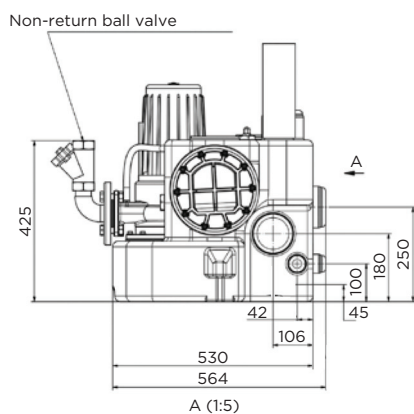Flexible connection piece DN 65  
for vent pipe

Input 100 / DN 50

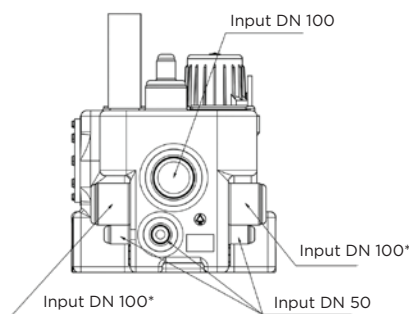

\*This entrance must be directed at a height of 250 mm above the ground level directly after the lifting station.

 **SFA** GROUP  
Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber