

Oblio

Rain Head & Arm Ceiling Mounted

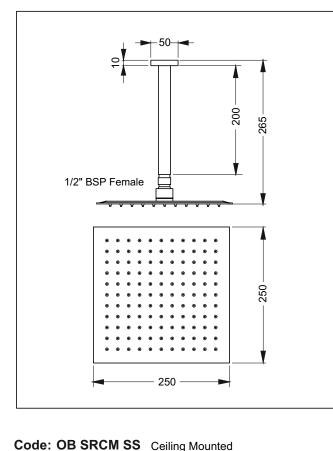

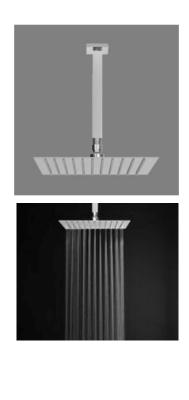

Code: OB SR HEAD ONLY SS Head only Finish: Stainless Steel Water Inlet: 1/2" BSP Female Installation Hole Diameter: (all arms) Minimum: 21mm Maximum: 30mm

 Rain Head: 250 x 250mm

 Inlet: 1/2" BSP thread - Female

 Nipples Replaceable (5 spares) Rubs clean & arranged in an 11 X 11 grid

 Spray pattern: @ head = 200 X 200mm

 @ 1/2m = 200 X 200mm

Flow Rate: Max. 35kPa = 10.8 litres/min

Arm: Square 22 X 200mm long Inlet/outlet: 1/2" BSP male Cover Flange: 50 X 50 X 9mm Installation Hole: 21 - 30mm

Flow control: PCW 9

Please note: Removal of the flow control on mains pressure may void the warranty



ooitoupo

KIWI OWNED COMPANY



Aquatica NZ Limited

9 Saunders Place, Avondale, Auckland. Tel: 09-828 2068, Fax: 09-828 2069 Email: info@aquatica.co.nz or visit our website: www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for low/unequal & mains pressure systems Recommended Operational Pressure Range: 35 - 600 kPa Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation