





Installation Instructions

Alcove

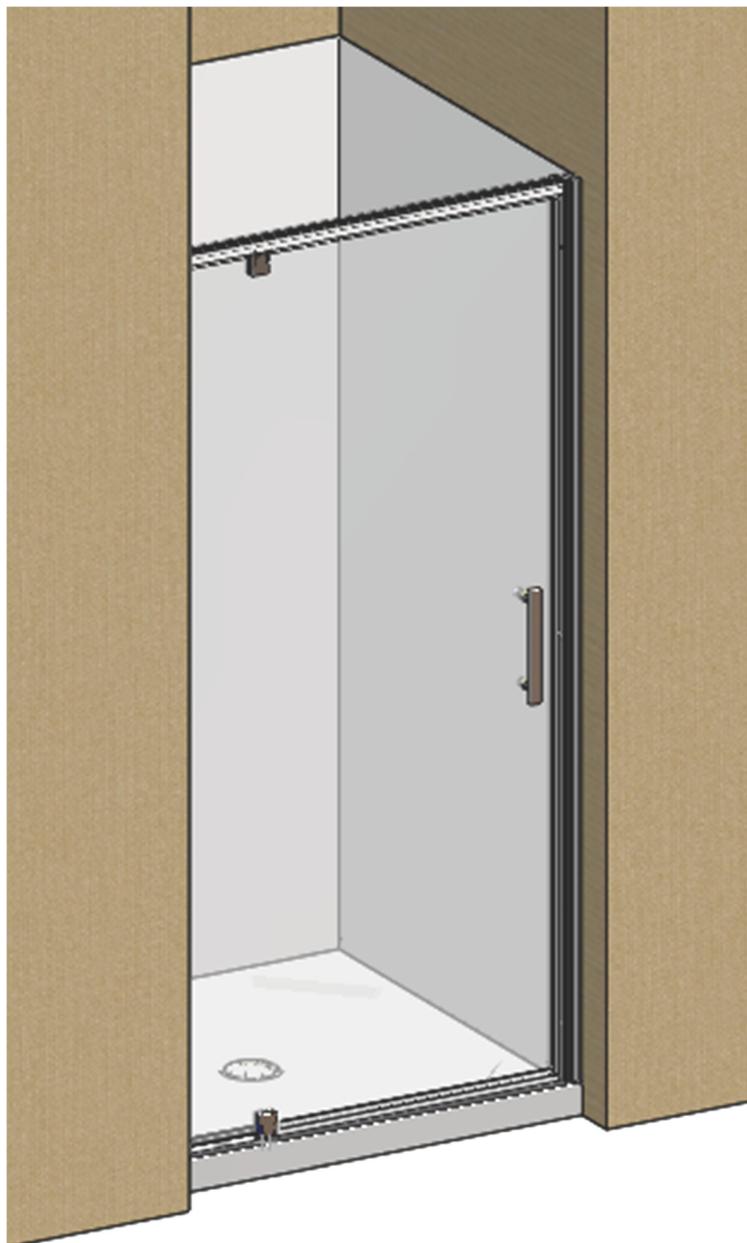

Please read these Instructions carefully

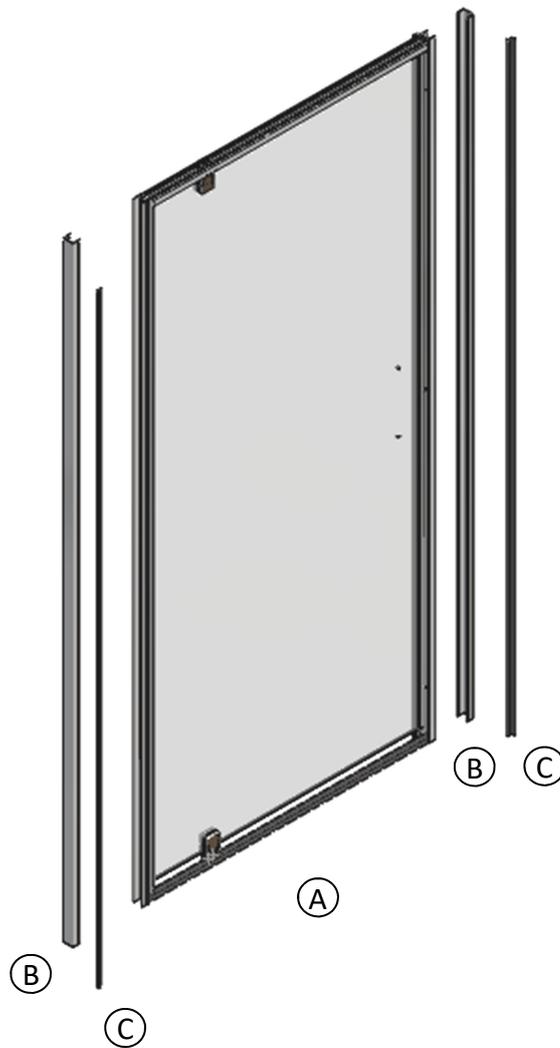

Components


- A - Door Assembly
- B - Door Wall Receiver
- C- Cover Trim x 2 (On Selected Models)

Tools Required

- Drill
- Spirit level
- Tape Measure
- Screw Driver (No.1 Sq drive)
- Caulking Gun
- Masking tape
- Pencil
- Cleaning Cloth

(For shipping purposes the Door & Return Receivers are packed in the sides of the Door and Return


Installation Components

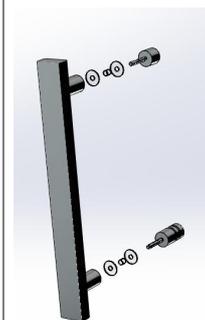

Handle
(where applicable)



Tube of NG Silicone
(Colour matched to shower)



Drip Seal –1m



No.6 x 38mm screw
Qty 6



Cleaning Towelette
(White showers only)



Screw Cap
Qty 6



No.6 x 10mm screw




9mm Plug
Qty 3



Installation

Note:

Your shower Door can be installed to open from the left or right hand side by rotating the door 180 degrees, and the Return Panel can be fitted on either side. You must decide which way the door is to open before starting the installation.

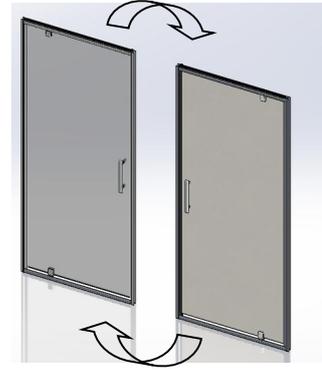

Wall Receivers




1) Determine which side the Door is to be hung. Position one of the Door Wall Receivers hard against the inside edge of the tray up-stand.

2) Plumb up the Door Wall Receiver using a spirit level. Mark the position with a pencil line.


3) Pre drill three equally spaced clearance holes (i.e. top, bottom and centre) in the Door Wall Receiver using a 4.5mm drill bit. Reposition the Wall Receiver to the pencil line on the wall. Drill into the wall through the clearance holes using the 3.0mm drill bit. **N.B.** The holes preferably locate into a stud or nog. As an alternative, a toggle system can also be used.

NOTE: If the shower walls are to be tiled the Wall Receivers must be installed to the Water proof membrane before tiling. This ensures the doors will fit within the lip of the tray

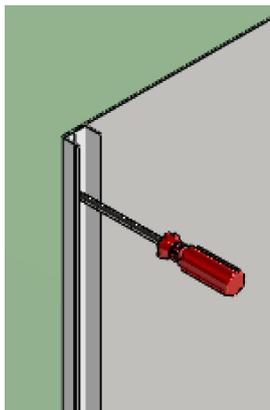

4) Secure the Wall Receiver to the wall using the No.6 x 38mm stainless steel screws



NB As a precaution apply silicone sealant into the drilled holes

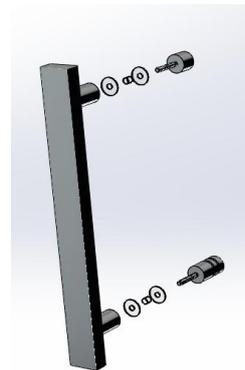



5) Fit the handle to the door (where required). This will assist in the opening & closing during the installation process

Ensure to fit the plastic washers and bush to prevent metal on glass contact

Door

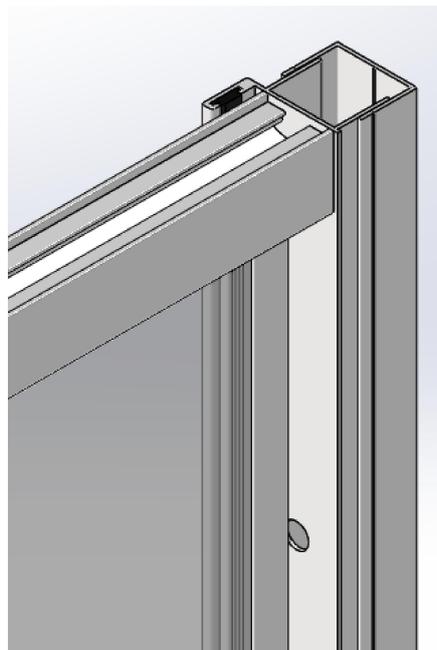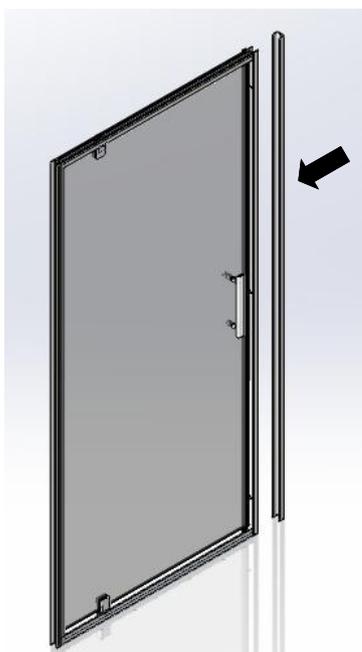

6) Side the remaining Door Wall Receiver onto the Door Assembly.

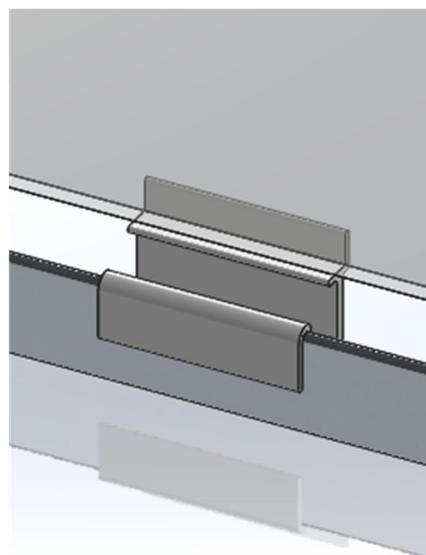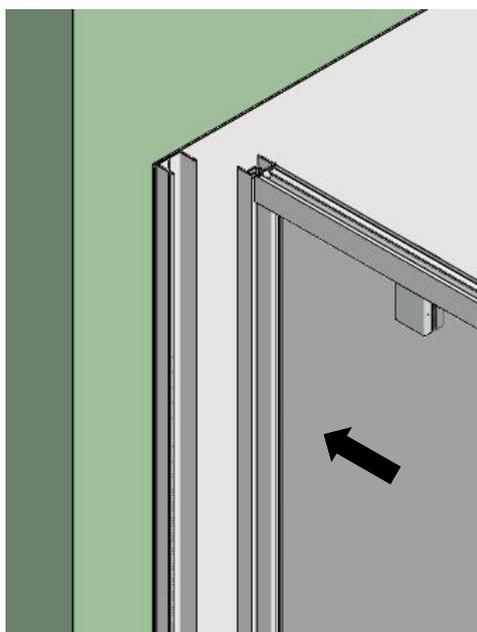


7) Ensure the Door is facing the correct way with the door opening outwards. Do not remove the door setting block, this will assist in supporting the door during installation and setting the correct clearance from the sill.

Lift the Door assembly with the Wall Receiver attached onto the shower step and slide into the Door Wall Receiver already installed



8) Plumb the Door and remaining Wall Receiver. Through the oversize holes in the Door jamb drill through the Wall Receiver frame and into the wall stud using a 3.0 mm drill bit

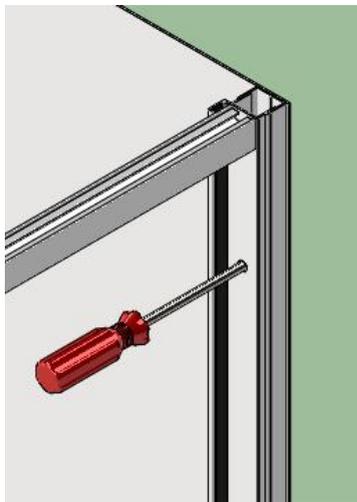

9) Secure the Wall Receiver to the wall using the No.6x 38mm stainless steel screws.





10) Cap the oversize holes in the door Jamb using the 9mm plastic plugs

Secure the Door Set (All Screw fixings are made from the Inside)




13) From the inside using a 3.0mm drill bit; drill through the vertical sections of the Door into the Wall Receivers. Fix the Door to the Wall Receivers. You must have a minimum of 10mm overlay and the holes must be drilled no less than 5mm from the edge of the vertical aluminium sections. Secure in place using the 6 gauge x 10mm screws.

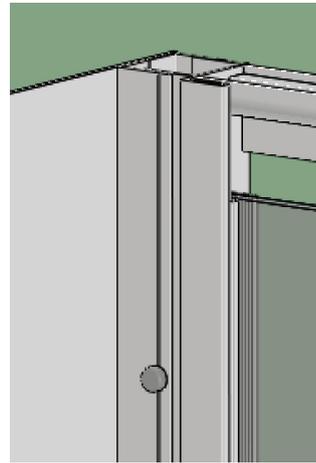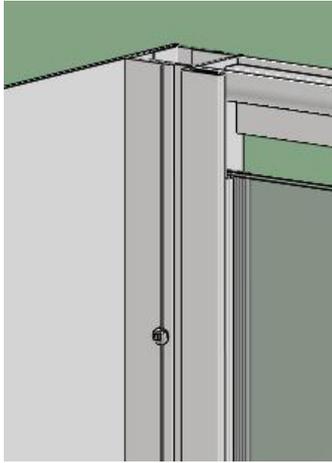

- 14)** Secure in place using the 6 gauge x 10mm screws. **15)** Cover all Screw heads with the Screw Caps



Adjust the Door

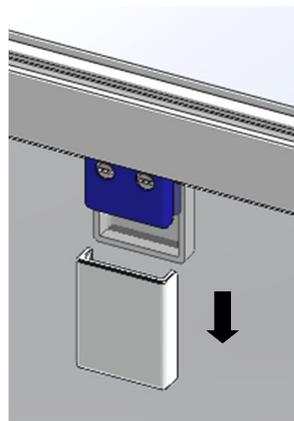

- 16)** Slide the outside Clamp Block Covers off the Pivot Clamp. Using a flat blade screwdriver sufficiently loosen the two screws, adjust the door by sliding left or right in the pivot

Once the door adjustment is complete ensure the screws are retightened and reinstall the Clamp Block Covers. Open the door and remove the door setting block

Drip Seals

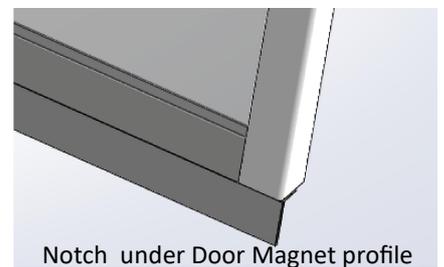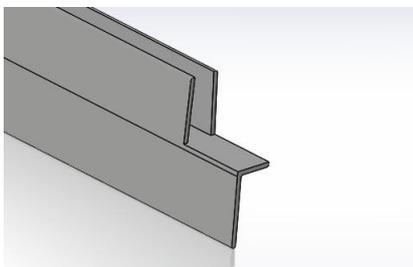



Notch under Door Magnet profile

- 17)** The Drip seal is supplied in a 1m length, this will need to be cut to the desired lengths for each side of the pivot . The opening side Drip seal will also need to be notched to fit under the door magnet profile. Make the Notch 13mm in length and finishing down to the horizontal ledge of the drip seal

- 18)** Fit the Drip Seals to the glass door

NOTE: The flexible vertical blade will face towards the inside of the shower

Sealing the Shower

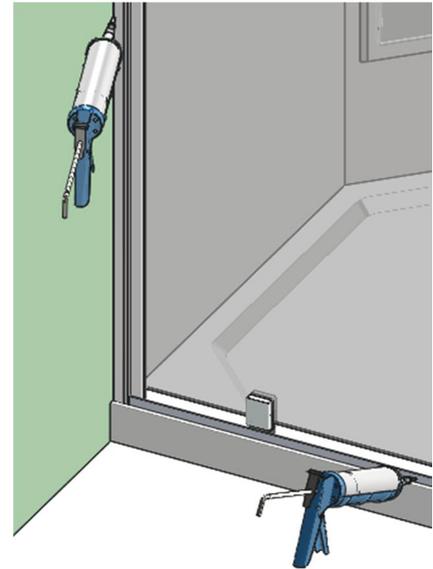

17) For White Showers only - take the Cleaning Towelette and wipe the surfaces of the Powder coated profiles where Silicone will be applied Allow to dry (1-2 minutes)

18) The Door can now be sealed in place using silicone sealant. Ensure all surfaces are first cleaned with dry clean cloth. Seal between the tray upstand and the door set along the bottom outside edges. Seal vertically between the Wall Receivers and Wall Liner


Note MASKING the area to be Sealed will result in a superior finish

IMPORTANT: DO NOT apply sealant to the inside of the shower

19) Cover Trim– (selected models only)

The Cover Trim is provided to cover the exposed vertical edge of the wall liner and is the final step of the installation. For some installations the Cover trims may require cutting to length

To fit the Cover trim apply small vertical beads of silicone down the Wall Receiver and the exposed wall lining outside of the Wall Receiver. Embed the Cover trim into the silicone. If the liner extends more than 10mm it will need to be trimmed prior to fitting the Cover Trim

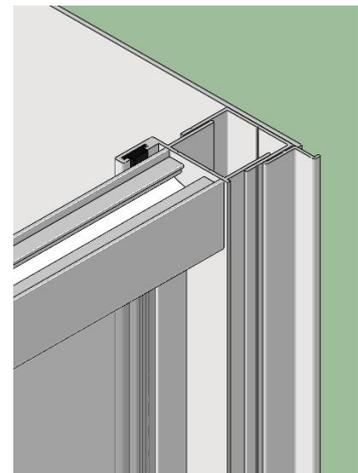

22) Your Shower is now complete. Allow the Sealants to cure for a minimum of 24 hours

