

Shower Kit **VDAPT04**



Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install flow restrictor as shown in the restrictor pack.

This will comply with the mains pressure WELs rating.


Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Fit the flange and then screw the supply body onto the wall pipe nipple or spigot (shower wall outlet) using an thread sealant.
- Connect the shower hose to the outlet of the supply body.
- Connect the handpiece to the shower hose (conical end).
- Turn on water supply. Check for leaks.

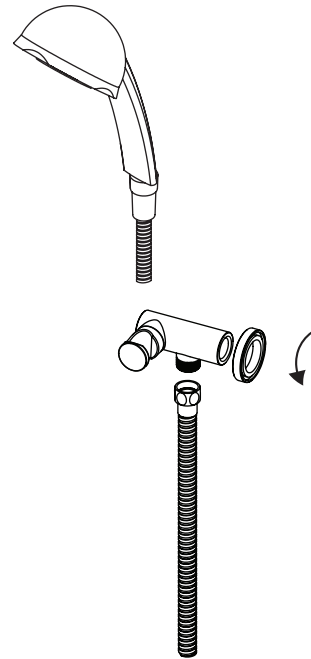

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: **www.vodaplumbingware.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning your Voda product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.