


## Olympia Wall Mounted Basin Mixer Brushed Nickel **VOP21BN**

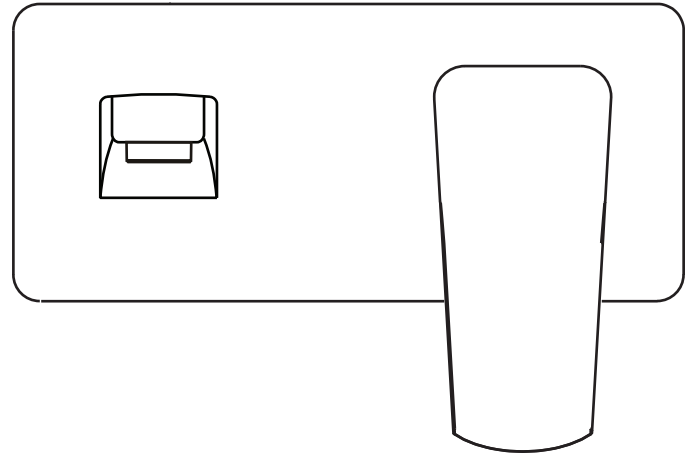

Congratulations on your purchase of this high quality product from Voda Plumbingware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### TECHNICAL SPECIFICATIONS

#### Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

Mains Pressure systems Prior to installation, change the aerator to the Mains Pressure one supplied in the box.

Do not attach the flat flow restrictor.

Unequal Low systems Attach the flat flow restrictor (with the o-ring facing out) to the cold inlet.

Equal Low systems Install as supplied. Do not attach the flat flow restrictor.

### INSTALLATION

**For pressures exceeding 500kPa, install a pressure limiting valve. Failure to do so may void the warranty.**

- Before commencing installation turn off the water supply.
- Flush all water lines to remove any foreign materials (so it does not interfere with the flow regulated aerator or damage the cartridge).
- Make sure that the body recess including wall lining thickness does not exceed 41.5mm to the body centre.
- Note the protrusions at the back of the body to ensure a perpendicular mounting, once screwed into place.
- Install, making sure the spout is on the left. The spout fitment is the final anchor point for the body set.
- Turn on mains supply.
- Check for leaks.

**Plumbers Note: Do not pressure test this mixer under static pressure.**

ATTACH PROOF OF PURCHASE HERE

#### **WARRANTY**

Please refer to our website for warranty information: [www.vodaplumbingware.co.nz/warranty](http://www.vodaplumbingware.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

#### **CARE AND MAINTENANCE**

When cleaning this product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.