


Soul Diverter Shower Mixer **VSU035**



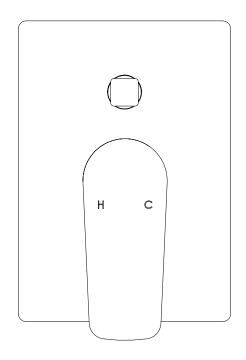

Congratulations on your purchase of this high quality product from Voda Plumbingware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only

Minimum Pressure = 150kPa Maximum operating Pressure = 500kPa Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Not suitable.

Not suitable. Equal Low systems

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- The distance from the mixer to the wall outlet must be no greater than 750mm.
- The red (or H) marked port is for the hot supply line which is to the left side.
- Turn on water supply. Check for leaks.

Plumber's note: Do not pressure test this mixer under static pressure.

WARRANTY

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

ATTACH PROOF OF PURCHASE HERE

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning your Voda product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.