



BASIN SPECIFICATION

Dignity



Cabinet range (refer to applicable cabinet specifications)











LONDON

RIVA CLASSIC

CITY 46


Product Features	
Type of basin	Inset
Material of basin	Cherry Pie®
Capacity of basin	8 litre
Overflow Configuration	No overflow provided
Colour options	White Matte


- The basin must be sealed to the top with an acetic cured silicone sealant.
- Epoxy type sealants must not be used.

INDICATES TOP SURFACE --

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 20 / 03 / 2020







Cabinet range (refer to applicable cabinet specifications)









LONDON

RIVA CLASSIC

02110010			
Top Thickness (mm)	Cherry Pie	HPL	
City 46	20.5	17.5	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	D	E
City 46 - 700	700	460	350	265	50
City 46 - 700 (wall mount tap)	700	460	350	230	-
City 46 - 900	900	460	450	265	50
City 46 - 900 (wall mount tap)	900	460	450	230	-
City 46 - 1200	1200	460	600	265	50
City 46 - 1200 (wall mount tap)	1200	460	600	230	-

INDICATES TOP SURFACE --

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 20 / 03 / 2020







Cabinet range (refer to applicable cabinet specifications)









LONDON

RIVA C CLASSIC

Top Thickness (mm)	Cherry Pie	
Riva Classic	20.5	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	(D)	E
Riva Classic - 750	750	460	375	265	50
Riva Classic - 750 (wall mount tap)	750	460	375	230	-
Riva Classic - 900	900	460	450	265	50
Riva Classic - 900 (wall mount tap)	900	460	450	230	-
Riva Classic - 900 - LH	900	460	340	265	50
Riva Classic - 900 - LH (wall mount tap)	900	460	340	230	-
Riva Classic - 900 - RH	900	460	560	265	50
Riva Classic - 900 - RH (wall mounted tap)	900	460	560	230	-
Riva Classic - 1200	1200	460	600	265	50
Riva Classic - 1200 (wall mount tap)	1200	460	600	230	-
Riva Classic - 1500	1500	460	750	265	50
Riva Classic - 1500 (wall mount tap)	1500	460	750	230	-

INDICATES TOP SURFACE --

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 20 / 03 / 20
Date edited: 20 / 03 / 20







Cabinet range (refer to applicable cabinet specifications)









VA CIT

Top Thickness (mm)	Cherry Pie	
London	60	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	(D)	E
London - 750	750	510	375	300	80
London - 750 (wall mount tap)	750	510	375	255	-
London - 900	900	510	450	300	80
London - 900 (wall mount tap)	900	510	450	255	-
London - 1200	1200	510	600	300	80
London - 1200 (wall mount tap)	1200	510	600	255	-

INDICATES TOP SURFACE --

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 20 / 03 / 2020

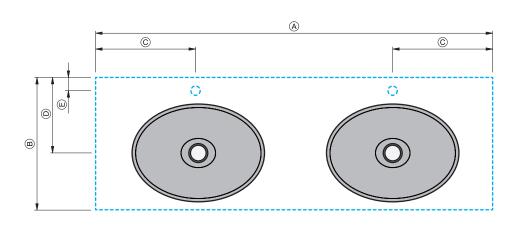





Cabinet range (refer to applicable cabinet specifications)









LONDON

RIVA

y Pie HPL
0
).5
0.5 17.5
C

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

Product Dimensions (mm)	(A)	B	©	(D)	E
City 46 - 1200 - DB	1200	460	300	265	50
City 46 -1200 - DB (wall mount tap)	1200	460	300	230	-
City 46 - 1400 - DB	1400	460	350	265	50
City 46 - 1400 - DB (wall mount tap)	1400	460	350	230	-
Riva Classic - 1200 - DB	1200	460	300	230	50
Riva Classic - 1200 - DB (wall mount tap)	1200	460	300	230	-
Riva Classic - 1500 - DB	1500	460	375	265	50
Riva Classic - 1500 - DB (wall mount tap)	1500	460	375	230	-
London - 1500 - DB	1500	510	377.5	300	80
London - 1500 - DB (wall mount tap)	1500	510	377.5	255	-

INDICATES TOP SURFACE

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 20	0 / 03 / 2020
-----------------	---------------