



BASIN SPECIFICATION

Sfera



Cabinet range (refer to applicable cabinet specifications)









CITY 46 CITY 50

Product Features	
Type of basin	Vessel
Material of basin	Ceramic
Capacity of basin	8 litre
Overflow Configuration	Overflow not provided
Colour options	White Matte, White Gloss, Black Matte


- The basin must be sealed to the top with an acetic cured silicone sealant.
- Epoxy type sealants must not be used.

INDICATES TOP SURFACE ---

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 10mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 20 / 03 / 2020

01/03

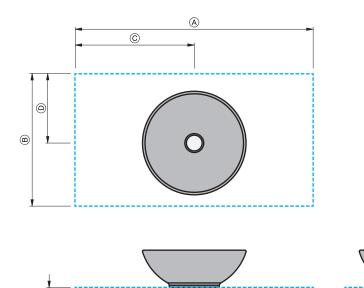



TOP SPECIFICATION Sfera

Cabinet range (refer to applicable cabinet specifications)







RIVA CITY 46

Top Thickness (mm)	Cherry Pie	HPL	
Riva Classic	20.5		
City 46	20.5	17.5	

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	(D)	€	
City 46 - 700	700	460	350	230	-	
City 46 - 900	900	460	450	230	-	
City 46 - 1200	1200	460	600	230	-	
Riva Classic - 750	750	460	375	230	-	
Riva Classic - 900	900	460	450	230	-	
Riva Classic - 900 - LH	900	460	340	230	-	
Riva Classic - 900 - RH	900	460	560	230	-	
Riva Classic - 1200	1200	460	600	230	-	
Riva Classic - 1500	1500	460	750	230	-	

INDICATES TOP SURFACE -

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited:	20 / 03 / 2020
--------------	----------------

02/03

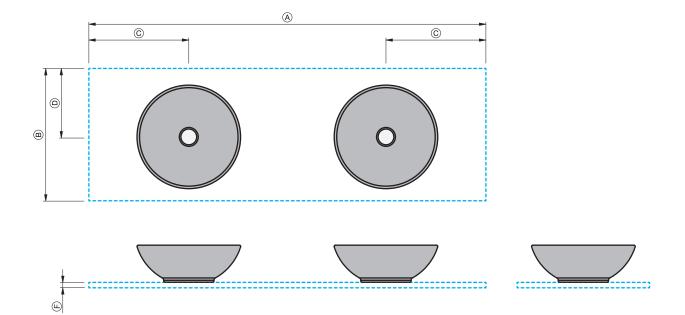



TOP SPECIFICATION Sfera

Cabinet range (refer to applicable cabinet specifications)









Top Thickness (mm)	Cherry Pie	HPL
Riva Classic	20.5	
City 46	20.5	17.5

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

Product Dimensions (mm)	A	$^{\otimes}$	©	(D)	E
City 46 - 1200 - DB	1200	460	300	230	-
City 46 - 1400 - DB	1400	460	350	230	-
Riva Classic - 1200 - DB	1200	460	300	230	-
Riva Classic - 1500 - DB	1500	460	375	230	-

INDICATES TOP SURFACE

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 20 / 03 / 2020

03 / 03