


Angelo

Bath Taps

aquatica

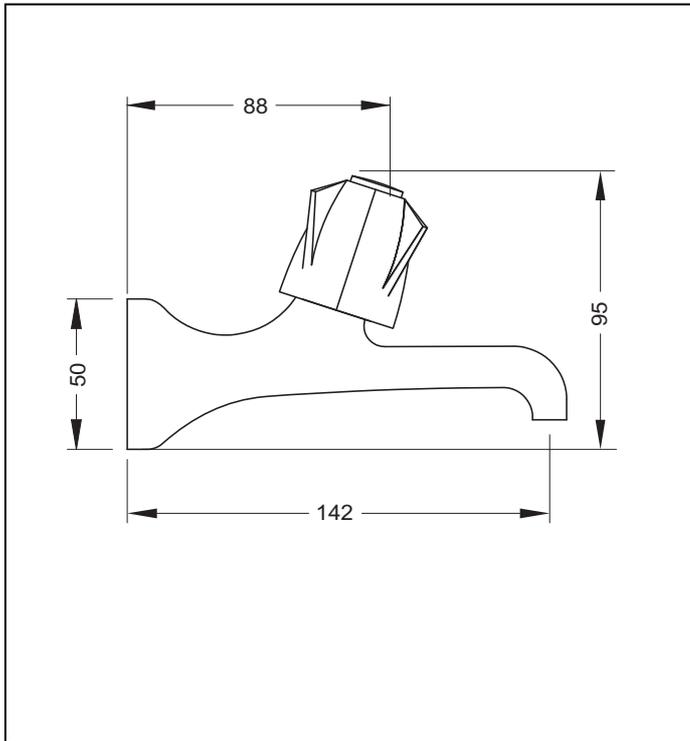

Code: AN BT15 15mm Inlet
Code: AN BT20 20mm Inlet

Finish: Chrome

Sold as a pair

Supplied with base O-ring seal

Mechanism: Standard Washer

- Range available with half-turn ceramic mechanism on request
(add OPTION CERAMIC to code)

Water Outlet: Open

Mounting: Installation Hole Diameter - 15mm taps: Minimum: 22mm
Maximum: 40mm

Installation Hole Diameter - 20mm taps: Minimum: 26mm
Maximum: 40mm

Flow Control: Nil regulation

Max hot @ 35 kPa = 14 l/min



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 20 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

No WELS rating required