



APPLICATIONS



REFRIGERATOR



AIRCONDITIONER



ICE MACHINE

PRODUCT REFERENCE:  
SA91

SANICONDENS BEST FLAT

# Sanicondens® Best Flat

The Sanicondens® Best Flat is specifically designed for disposal of condensate from air conditioning units, refrigeration units and is ideal for ice machines due to its low profile design.




## TECHNICAL CHARACTERISTICS


<b>Noise Level</b>	45 dB
<b>Motor Power</b>	60 Watts
<b>Flow Rate</b>	342 L/h
<b>Voltages</b>	220-240 V/50 Hz
<b>Tank Volume</b>	3.5 L
<b>Working Waste Water Temp</b>	35°C/Max 80°C (intermittent)
<b>Product Weight</b>	2 kg
<b>Overall Measurements</b>	260 x 169 x 143 mm
<b>Inlet Pipework</b>	25/32 mm
<b>IP Rating</b>	IP20

## WHY CHOOSE THIS PRODUCT?

- 3.5 L tank
- Three entry points
- Working temperature of 35°C
- Will handle temperatures up to 80°C for short periods (5 minutes)
- Supplied with 1.5 m power cable and 5m of discharge pipe
- High level alarm connectivity
- Low profile inlet connection

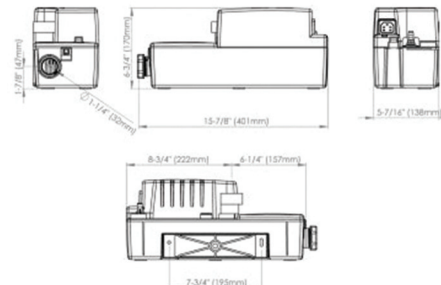

## VERTICAL/HORIZONTAL PERFORMANCE

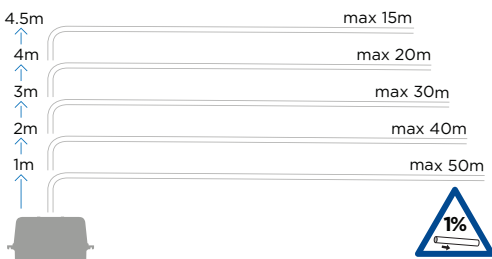

## FLOW RATE PERFORMANCE CHART

