



Sanicondens Clim Mini S pack includes a fixing plate

# Sanicondens® Clim Mini S

The new scaled down generation of pump for wall air conditioners, designed to meet market requirements and is now equipped with the best features.

## TECHNICAL CHARACTERISTICS

<b>Low Noise Level</b>	21 dB(A)
<b>Possible Connections</b>	Air conditioners up to 8kW / 27 000 BTU
<b>Ø int. Inlet</b>	16 mm
<b>Ø int. Discharge Pipework</b>	6 mm
<b>Maximum Fflow</b>	9 l/h +/- 15%
<b>Maximum Incoming Water Temperature</b>	35 °C
<b>Maximum Suction Lift (between the detection unit and the pump)</b>	2 m
<b>Voltage</b>	220-240 V
<b>Supply Frequency</b>	50 Hz
<b>Max Power</b>	22 W
<b>IP Rating Index</b>	IP20




## WHY CHOOSE THIS PRODUCT?

Designed for air conditioner split systems

Very quiet operation

A compact pump for hidden installation inside head unit

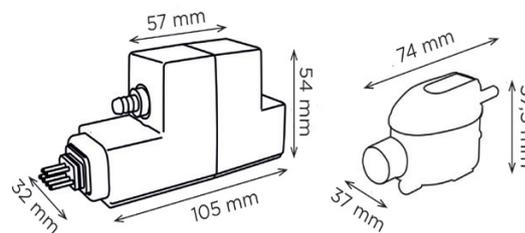

## FLOW RATE PERFORMANCE CHART

Discharge height (m)

