

INSTALLATION INSTRUCTIONS



TOILET

EVORA™ Wall-hung



With an Englefield toilet suite you can be sure of having excellence, comfort, durability and style.

It's the details that Englefield cares about - from pioneering the latest technology, to innovative design.



BEFORE YOU BEGIN

Before proceeding with installation, please read these instructions carefully to familiarise yourself with the required tools, materials and installation sequences. Please leave these instructions for the consumer after installation.

Prior to installation, inspect the toilet to ensure that no damage has occurred in transit. If damage has occurred, or a visible defect exists, do not proceed with installation, and advise your supplier immediately.




CAUTION: Risk of personal injury or product damage. Handle with care. Vitreous china can break or chip if the product is handled carelessly.

- Observe all local plumbing and building codes. Installation shall be in accordance with AS/NZS 3500 and AS/NZS 6400.
- Select a suitable WM certified 4.5/3 L cistern with 180mm fixing centres.


TOOLS AND MATERIALS REQUIRED




Adjustable
Spanner




Tape Measure




Level



Pipe Wrench



Tube Cutter



Safety Glasses




Drill & Bits



Sponge



Screwdriver




Caulking Gun

Plus:




- Adjustable Pliers
- Metal File
- 1/2" Socket
- Saw
- Silicone Sealant
- Pencil
- Metal file
- Knife
- Straight pipe coupling
- Connection packing

ROUGHING-IN

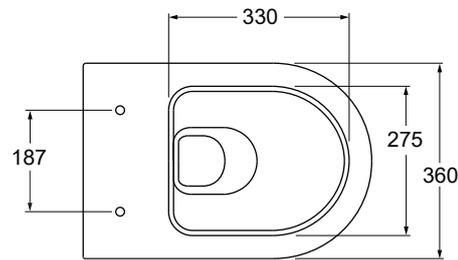

All dimensions in mm.

Kohler Co. reserves the right to change the marked dimensions without prior notice.

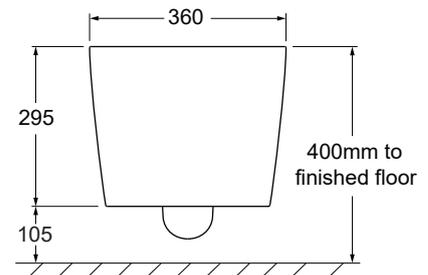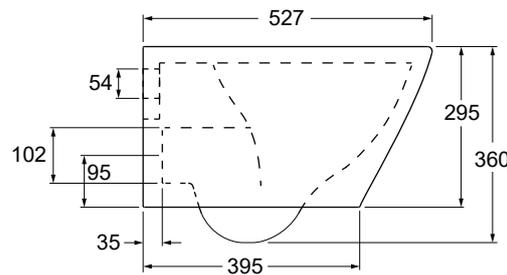

INSTALLATION

1 Install The Cistern

a) Turn the water supply off before installing the new toilet.

b) Install the concealed tank system in wall before decorating the wall.

c) Install the tank system as per the cistern's installation instructions.

Recommended Cistern:
4179A-NA Kohler In-Wall Cistern 4.5/3L



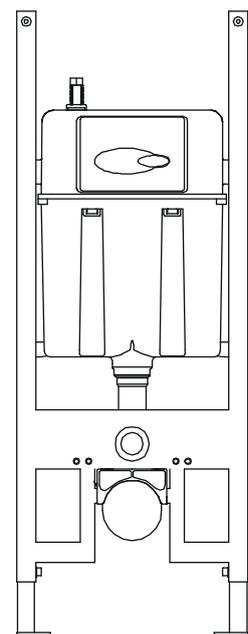


Fig.#2



2 Set The Spacing Of The Bowl

After installing the tank, allow a minimum of 48mm exposed stud length to protrude on the carrier studs for the bowl and tightening nuts. See Figure #3 for fixing dimensions to install the bowl onto the wall.

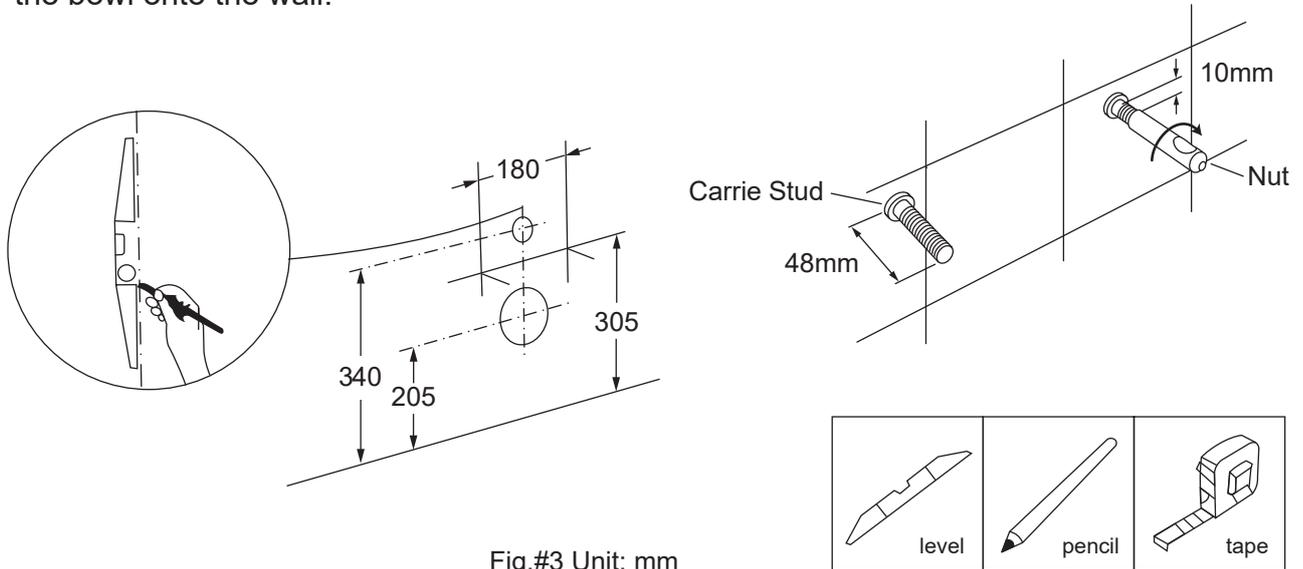





3 Attach Connection Pipe

- a) Apply lubricant to aid with installation.
- b) Attach inlet pipe to the concealed tank.
- c) Attach outlet pipe to the toilet.

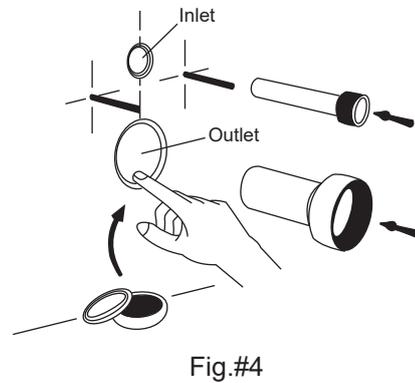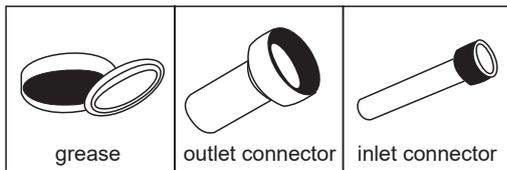


4 Install The New Toilet

- Cut plastic sleeves to length & fit over fixing bolts. Screw fixing pins onto bolts such that the centre of the machined recess is 65mm from the wall.
- Assemble the plastic boss, washer and nut to the pan.
- Lift the toilet and place in position over the carrier studs.
- Use hex key to gradually tighten the fixing kit and level the toilet. Fully tighten to secure toilet in place.

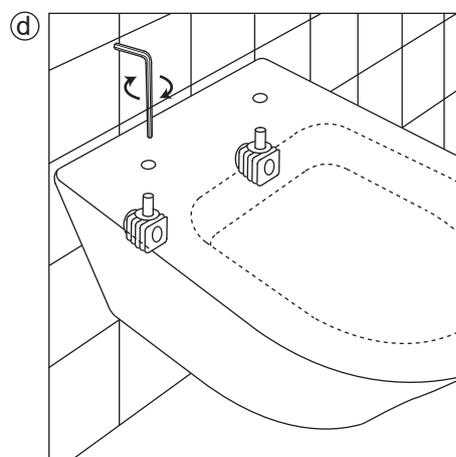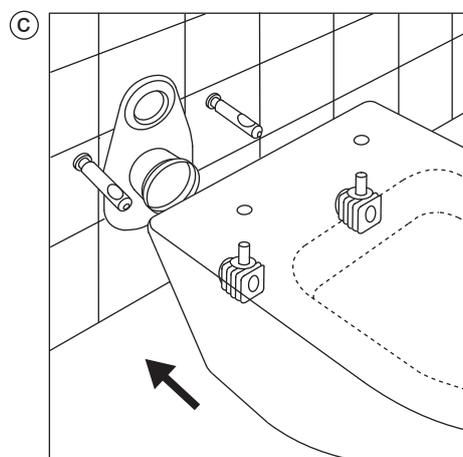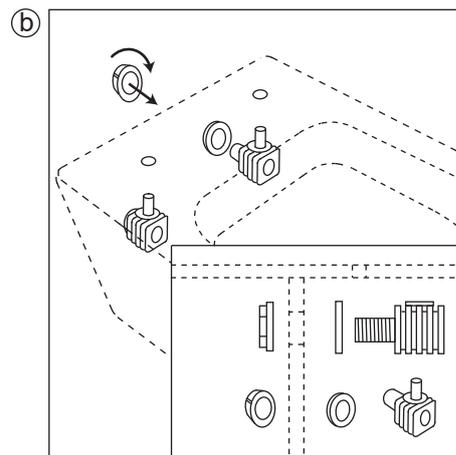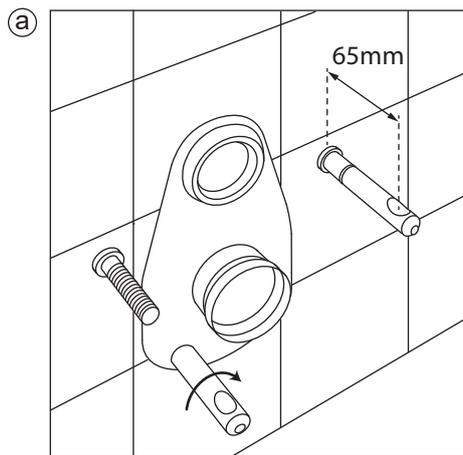


5 Finalise The Installation

- Apply an appropriate sealant to make sure the bowl's edge seals to the wall.
- Ensure that all the connections are tight.
- Turn on the water supply and check for any leaks.
- Flush the toilet to check for correct operation.

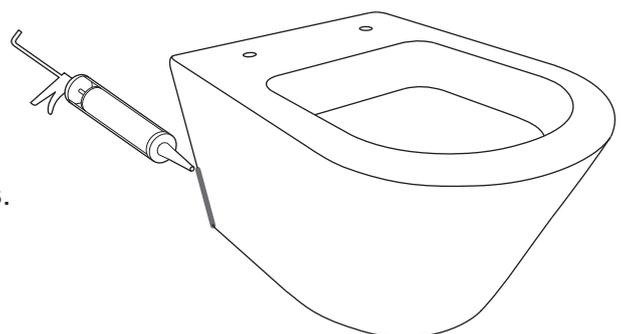

FIXING KIT

1333362 Evora Wall-hung
Pan Fixing Kit

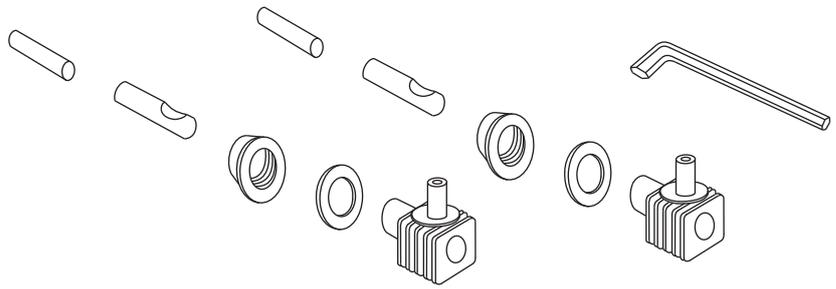

IMPORTANT CONSUMER INFORMATION

When cleaning up after installation, do not use abrasive cleaners as they may scratch and dull toilet surface. Remove stubborn stains, paint or tar with turpentine or paint thinner. Do not allow cleaners containing petroleum distillates to remain in contact with any toilet surface for long periods of time.

Remove plaster by carefully scraping with a wooden edge. Do not use metal scrapers, wire brushes or other metal tools. Use a powder type detergent on a damp cloth to provide mild abrasive action to any residual plaster.

Clean the outside surface of your vitreous china product with mild soap and warm water. Wipe the entire surface completely dry with a clean, soft cloth. Most toilet bowl cleaners are not harmful to the vitreous china surface of the toilet bowl. Please follow the bowl cleaner manufacturer's instructions carefully. Do not use abrasive cleaners or solvents.

CONTACT INFORMATION

NEW ZEALAND
KOHLER NZ LTD

Free Ph: 0800 100 382
Free Fax: 0800 664 488
www.Englefield.co.nz

AUSTRALIA
KOHLER CO.

Free Ph: 1 800 ENGLEFIELD
(1 800 364 533)
www.Englefield.com

For warranty information, please visit our website

