


Energii

Bath Spout Wall-Mounted

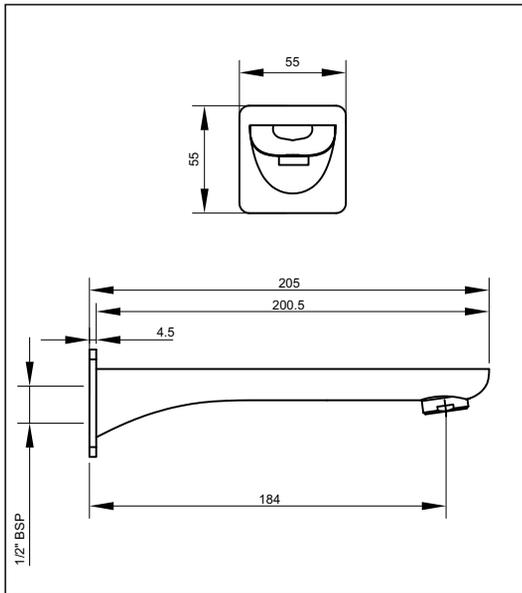

Code: EII BS BN BLK

Finish: Brushed Nickel - Matte Black / Matte Black / Chrome

Water Inlet: 1/2" BSP Female

Water Outlet: M24 ring with aerator fitted

Installation Hole Diameter:

Minimum: 18mm diameter

Total Length: 205mm (200.5 Bathspout + 4.5mm Faceplate)

Flow: Max Hot Flow @ 35kPa = 10.8 l/min

Faceplate: 55mm x 55mm x 4mm

aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 35 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

No WELS rating required

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation