



Depend on Davey

**DAVEY**

## APPLICATIONS

Davey RainBank is ideal for metropolitan rainwater harvesting for:

- Homes
- Toilet blocks
- Garden irrigation



## EvolutionMkII Rainwater Tank System

### with Davey RainBank inside

Dual source controller specifically designed to source rainwater for water applications such as toilets and/or laundry, with automatic mains water back-up. Also suitable for exterior taps.



## WHY CHOOSE THE EvolutionMkII Rainwater Tank System?


- Patented, yet uncomplicated technology, providing a dependable solution to rainwater harvesting.
- RainBank automatically switches between rainwater and mains water supply, so you don't need to think about it.
- Fits neatly in the top of the tank for a space-saving, sleek design.
- Incorporates easily with new homes and buildings. All installation materials are included to save you time and money.
- Placement of the connection points saves time on installation.
- Environmentally friendly:
  - Saving water
  - Reducing flow to storm water systems
  - No re-pumping of mains water
  - Low power consumption in standby
- No solenoid valves used. Provides seamless mains backup in the event of no rainwater or electrical interruptions.
- Built-in backflow protection valve (dual check valve) in compliance with the requirements of AS/NZS 3500-1-2003 for added safety and assured protection of your mains water supply.
- RainBank control module has Watermark approval under licence WMKA 22042.



OPERATING LIMITS	
Maximum flow rate (mains)	80 lpm
Maximum flow rate (pump)	80 lpm
Maximum Mains water pressure	600 kPa
Maximum pump pressure	350 kPa
Maximum pump amps	10 A
Level switch voltage	12 Volts DC
Maximum water temperature continuous	50°C
Minimum water temperature	1°C
Maximum ambient temperature	50°C
Mains water inlet size	20mm nylon olive
Rainwater inlet size	25mm PVC
Outlet size	20mm nylon olive

ELECTRICAL DATA	
Supply voltage	220-250V
Supply frequency	50Hz
Max. full load current	10A
Enclosure class	IP23
Power supply lead	incoming 3.5m
Pump Lead	10m

MATERIALS OF CONSTRUCTION	
Part	Material
<b>Dual check valve</b>	
Body	Nylon
Valves	Acetal
Springs	304 stainless steel
<b>Source control valve</b>	
Body	Nylon
Valves	Acetal
Plunger	Grivory
Diaphragm	Santoprene
Springs	316 stainless steel
Seal	Nitrile
Filter Lid	Polycarbonate
<b>Sensor plate</b>	
	316 stainless steel
<b>Enclosure</b>	
	A.B.S.

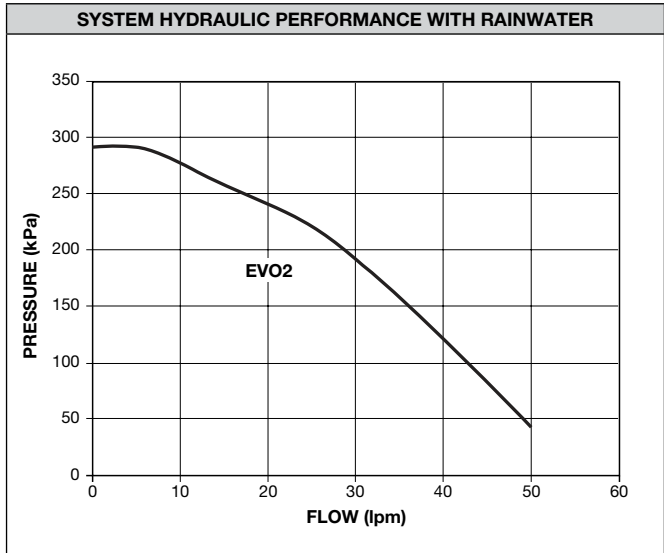

**IMPORTANT**

**Must be installed by a licensed plumber.**

