


Goccia

Sink Mixer 40

aquatica

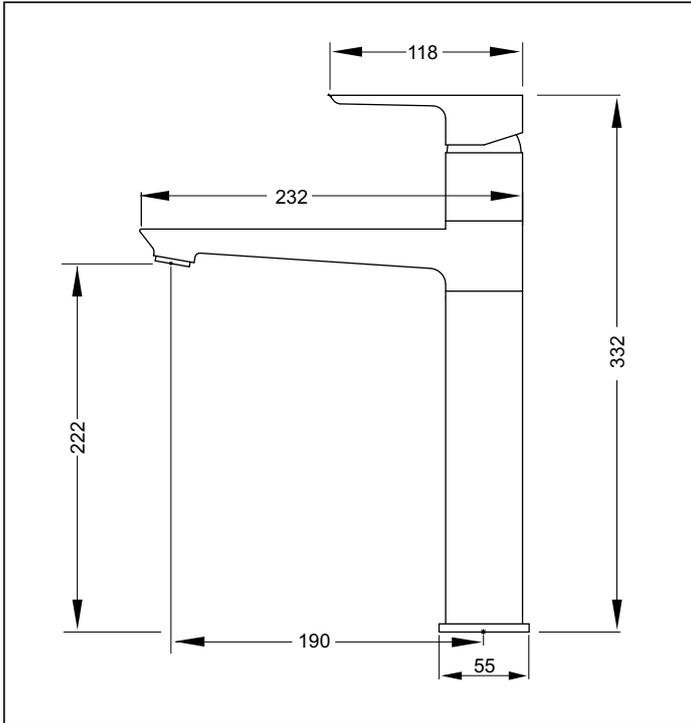

Code: GO SM40

Finish: Chrome

Spout: Swivel 360°

Water Outlet: M24 ring with PCA fitted and flow guide supplied

Stainless Steel Inlet Hoses:

Hot: Size: M12 x 1/2" BSP

Cold: Size: M12 x 1/2" BSP

Mounting Hardware: 32mm brass tube and backnut

Installation Hole Diameter:

Minimum: 33 mm

Maximum: 39 mm

Cartridge: Kerox 40mm Flat base

Flow: 8 l/min PCA supplied for regulated flow $\pm 10\%$ with mains pressure system

Max hot @ 35 kPa = 6.85 l/min

KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

