


Link

Basin Mixer

aquatica 

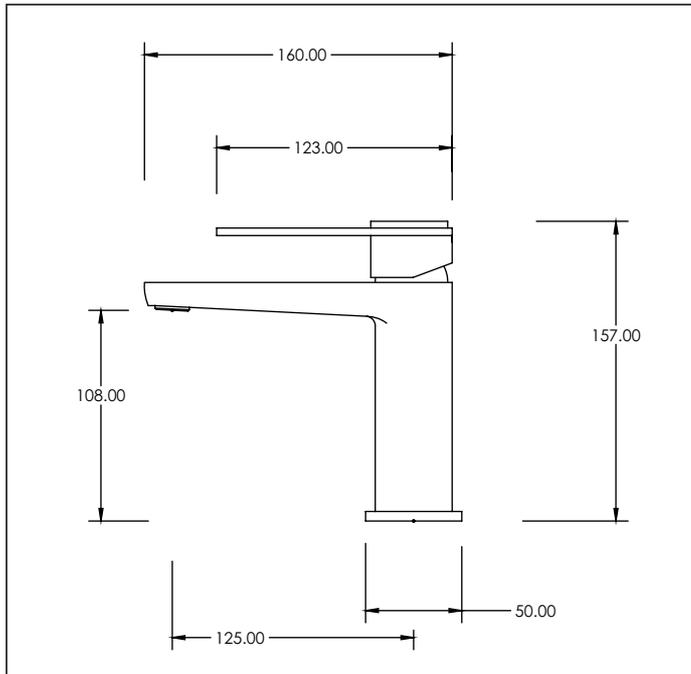

Code: LK BASMPAP	LK BASMAP CH-BLK	LK BASMPAP BLK	LK BASMAP BLK-CH	LK BASMAP BN-BLK
Finish: Chrome	Chrome Black	Black	Black Chrome	Brushed Nickel Black

Spout: Fixed

Water Inlet: Stainless Steel Inlet Hoses:
Size: M10 x 1/2" BSP

Water Outlet: M24 Slim Aerator with PCA fitted
Dress Ring supplied with O-ring seal

Installation Hole Diameter: Minimum: 28mm
Maximum: 38mm

Max Bench Thickness: 44mm

Mounting Hardware: 32mm Brass Tube and Backnut

Cartridge: 35mm Sedal raised base - High O-ring

Flow: 7 l/min PCA fitted for regulated flow with mains pressure system
Max hot @ 35 kPa with PCA = 4.6 l/min

KIWI OWNED COMPANY

NZ 
• DESIGNED
• ASSEMBLED
• TESTED

Suitable for all pressure

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019