


Link

Basin Mixer Wall Mounted

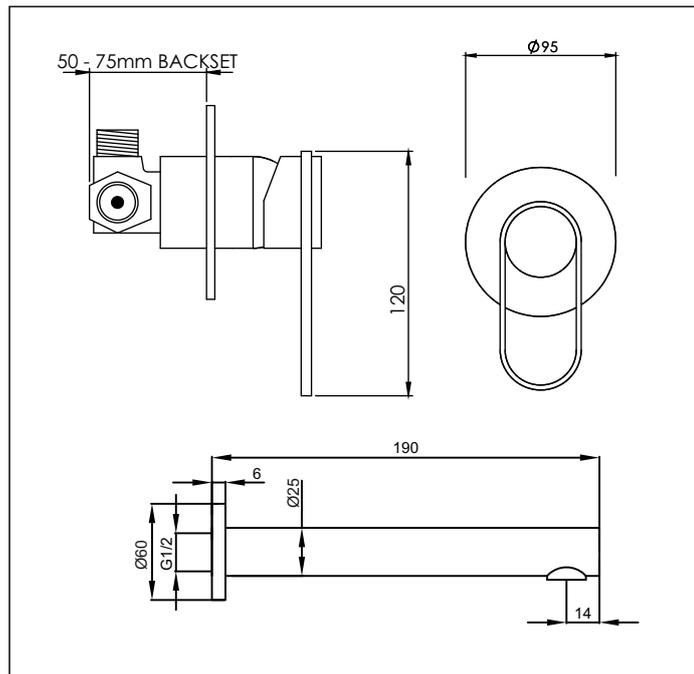

Code: LK BASMWM CH-BLK | LK BASMWM BLK-CH
Finish: Chrome-Black | Black-Chrome

Spout: Fixed

Water Inlet Spout : 1/2" BSP female thread with 1/2" BSP male thread supplied

Water Outlet: M24 Slim Aerator with PCA fitted

Water Inlet Mixer : 1/2" BSP male

Water outlet Mixer : 1/2" BSP male

Installation Hole Diameter Spout: Minimum: 18mm

Installation Hole Diameter Mixer: Minimum: 40mm diameter
 Maximum: 75mm diameter

Backset (Mounting board to front of tile): Minimum: 50mm
 Maximum: 75mm
 Recommended: 65mm

Cartridge: Kerox 40mm Flat Base

Flow: 7 l/min PCA fitted for regulated flow with mains pressure system

Max hot @ 35 kPa with PCA = 5.3 l/min

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa
 Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



aquatica



KIWI OWNED COMPANY

NZ • DESIGNED
 • ASSEMBLED
 • TESTED

Aquatica NZ Limited

9 Saunders Place,
 Avondale, Auckland.
 Tel: 09-828 2068,
 Fax: 09-828 2069
 Email: info@aquatica.co.nz
 or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019