


Nanu

Vessel Mixer

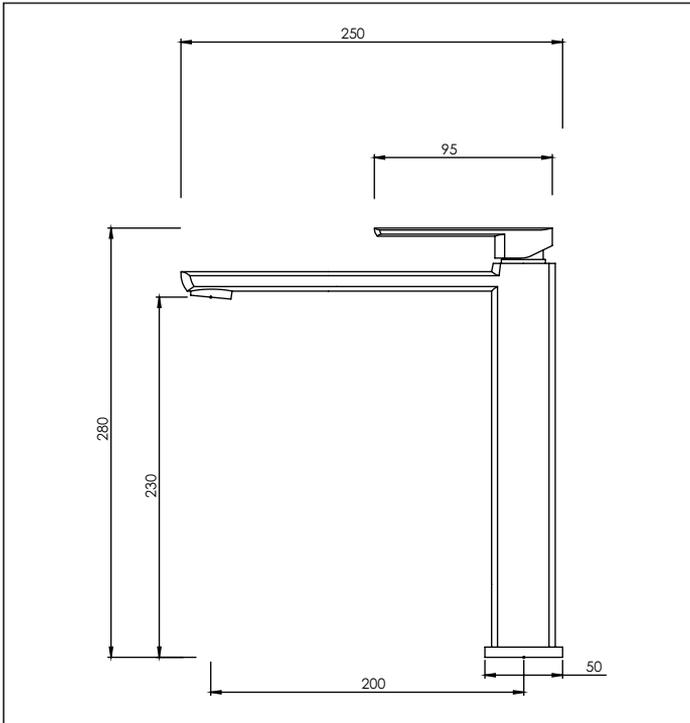

Code: NA VM

Finish: Chrome

Spout: Fixed

Water Outlet: Aerator Slim PCA

Stainless Steel Inlet Hoses:

Size: 2 x M10 x 1/2" BSP

Installation Hole Diameter: Minimum: 28 mm
Maximum: 35 mm

Mounting Hardware: Stud: 8mm
Nut: 11mm diameter
Horseshoe Washer
Custom base seal

Cartridge: Kerox 25mm cartridge

Flow Control: 7 l/min PCA fitted for regulated flow with mains pressure system

Max water flow @ 35 kPa: 4.3 l/min

aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

