


Nanu

Basin Mixer

aquatica 

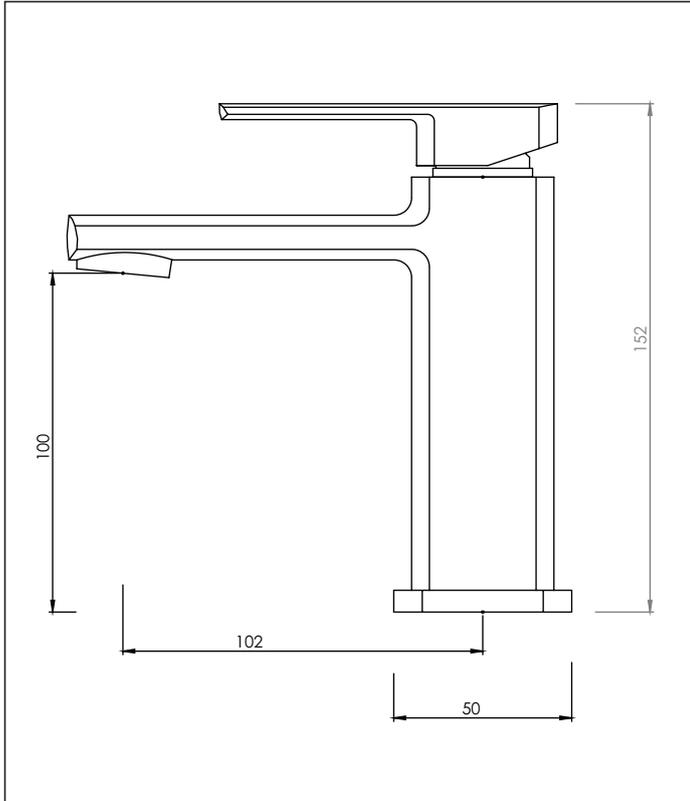

Code: NA2 BASM

Finish: Chrome

Spout: Cast brass. Fixed

Water Outlet: M24 Aerator Slim PCA

Stainless Steel Inlet Hoses:

Hot: Size: M10 x 1/2" BSP
Length: 400mm

Cold: Size: M10 x 1/2" BSP
Length: 400mm

Mounting Hardware: Stud: 8mm

Nut: 11mm Ø

Horseshoe washer

Installation Hole Diameter: Minimum: 28mm
Maximum: 35mm

Base Ring supplied with O-ring seal

Cartridge: SP Cart 25

Flow Control: 7 l/min PCA fitted for regulated flow with mains pressure system

Max Hot @35kPa = 4.3 l/min

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED 

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation