


Nanu 2

Swivel Basin Mixer

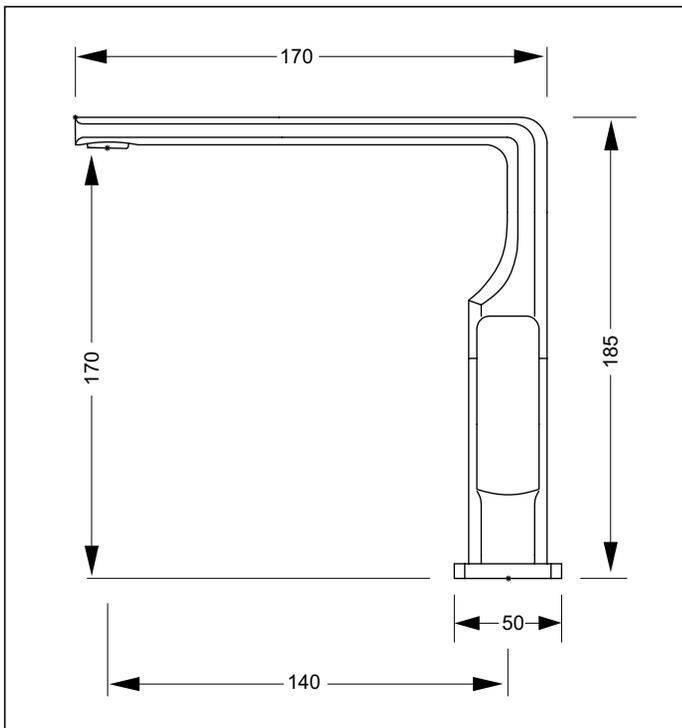

Code: NA2 BASMSW

Finish: Chrome

Spout: Cast, Swivel 360° 35 X 40mm

Water Inlet: Stainless Steel Flexi Hoses: Hot/Cold: Size: M10 x 1/2" BSP
Length: 350mm

Water Outlet: Slim PCA 7

Cartridge: Kerox 25mm Flat base

Installation Hole Diameter: Minimum: 28mm
Maximum: 35mm

Mounting Hardware: Stud: 8mm
Nut: 11mm A/F
Horseshoe Washer

Base Seal: Custom moulded seal

Max water flow @ 35 kPa: 4.5 l/min

Feature: Can be mounted up against wall, handle goes from vertical, forward 90° to horizontal

aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

