

TRITON | THE UK'S
SHOWER
COMPANY

Electric Showers

The Perfect Solution for a Remote Shower!



Instantaneous hot water showers.
Ideal for baches, offices & remote bathrooms.
No hot water cylinder required.


 **MADE IN
BRITAIN**

Smart Remote Solutions

Installing a continuous flow electric shower is the perfect solution for remote bathrooms and situations where there can be unpredictable demands for hot water, making them ideal for baches, offices and sports clubs.

With Triton electric showers, water is heated instantly on demand, so you'll never run out of hot water and you'll only pay for what hot water you use.

There's no need for a hot water cylinder and long runs of pipe which can waste water and result in heat losses. Therefore there is no stored water, saving on precious space and improving the affordability even further.

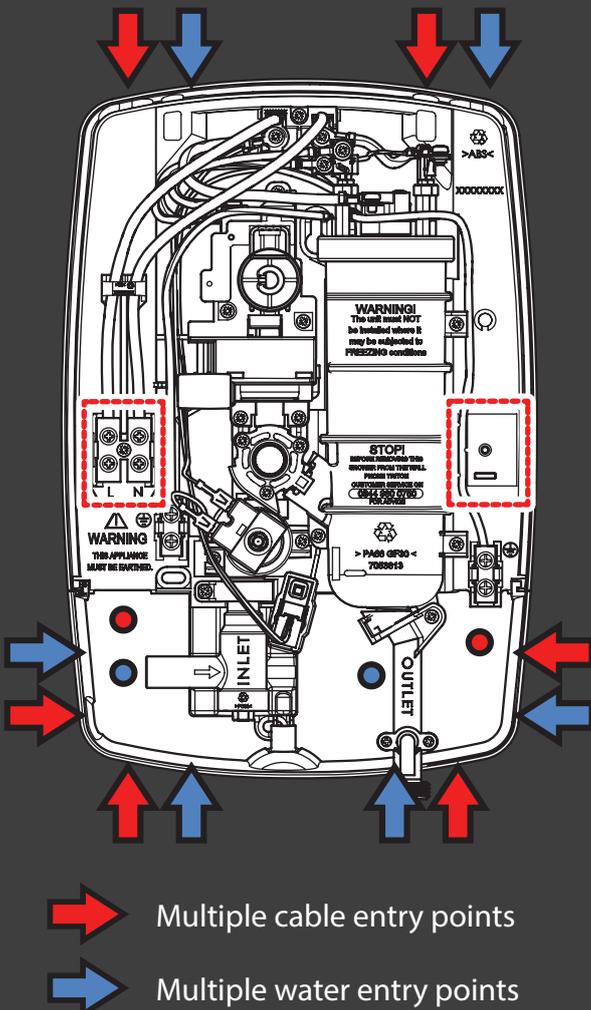

Smart Installation

The T80Z Electric heating elements located in the main unit operate at a constant rate at your chosen power setting. The rate of the water passing through the heater determines the water temperature. The slower the flow the hotter the water becomes; the faster the flow, the cooler the water.

During winter the mains water supply will be cooler than in summer, so the flow rate will vary between seasons at any one temperature setting.

Therefore at different times of the year you may have to adjust the position of the temperature control/dial to maintain your desired water temperature.

The Range

T80Z Fast-Fit Electric Shower



The T80Z Fast-Fit has multiple cable and water entry points located to the left and right side of the unit ensure easy fitting.

- Ideal size and shape for replacement installations
- Rub clean shower head with five different spray patterns
- Stylish riser rail kit with adjustable fixing brackets
- Push button Start/ Stop to select your favourite shower setting every time
- Swing-Fit™ - Terminal for left and right cabling
- Swivel-Fit™ - A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation



T60X Electric Shower



An entry level, value for money shower, combining simple design with easy to use functionality. If you are looking for a low cost shower with minimalist styling but the functionality of higher value showers, then this is the shower for you. Separate temperature and power controls and a low pressure indicator provide functionality to this shower.

- Low pressure indicator – operates when the water pressure is insufficient
- Separate power and temperature control dials
- Rub clean shower head – Single spray pattern
- Two year parts and labour guarantee



SafeGuard Care Thermostatic Shower

The Safeguard Care Pumped is ideal for low water pressure areas. Designed specifically for use with a gravity fed cold water supply from a header tank, the integrated pump boosts the flow rate of your shower.

The Safeguard Care Pumped is perfect for those who require additional showering aids and reassurance.

- Large push button Start/ Stop
- Ideal for low pressure areas, the integrated pump boosts the flow rate of your shower.
- This shower is BEAB Care and RNIB approved for total peace of mind.
- Two year parts and labour guarantee



Installation Guidelines

Only connect unit to a 230v - 240v AC supply.

The electrical supply must be adequate for the loading of unit and existing circuit.



The shower must be connected to its own independent electrical circuit

An isolation valve must be fitted in a convenient position in the supply pipe to allow the shower to be serviced.



Important

We recommend all TRITON shower installations be carried out by qualified tradespeople, and in accordance with the NZ Building code, trade regulations and the TRITON installation guide.

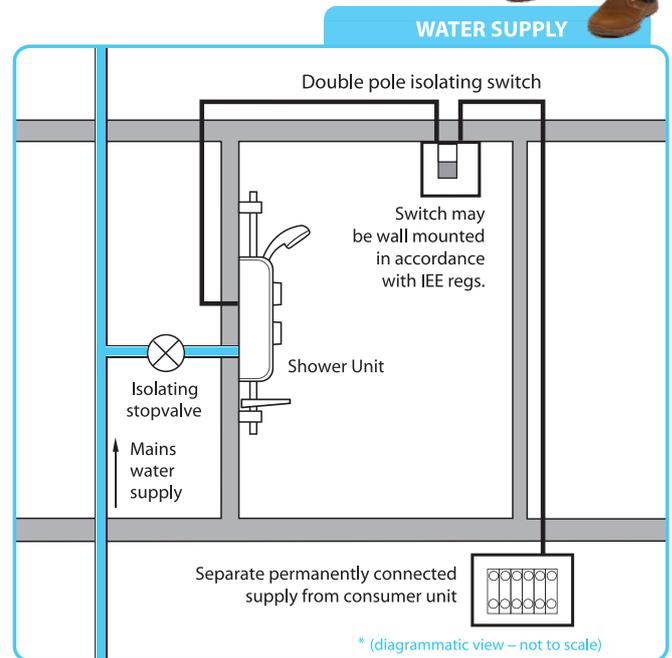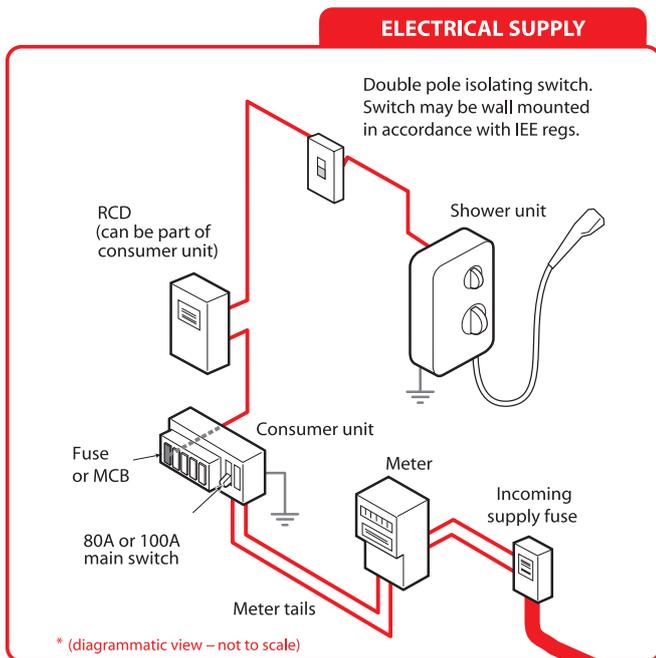

	T80Z Fast-Fit		T60X	Safeguard Care
Product Code	T80 Fast Fit W	T80 Fast Fit C	T60X	T100X
Finish	White	Chrome	White	White
Temperature Control	Stabilised		Stabilised	Stabilised
Power Ratings at 230v	8.7kW 38amps - IPX4 rated		6.4kW 28amps - IPX4 rated	7.8kW 34amps - IPX4 rated
Inlet Connection	15mm compression		15mm compression	15mm compression
Water Entry Points	Top, bottom, side bottom, back (left side of unit) Top, bottom, side bottom, back (right side of unit)		Top, bottom, back	Top, bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (left or right side of unit) Bottom, back (right hand side of unit)		Top, bottom, back	Top, bottom, back (right hand side of unit)
Outlet Connection	1/2" BSP		1/2" BSP	1/2" BSP
Plumbing System	Cold water only		Cold water only	Mains cold water only
Max Inlet Temp	28°C		28°C	28°C
Min Inlet Temp	2°C		2°C	2°C
Minimum Running Pressure/ Flow for full performance*	1.0 Bar @ 8 l/min		1.0 Bar @ 8 l/min	0.5 Bar @ 8 l/min
Maximum Static Pressure	10 Bar		10 Bar	10 Bar
Surface Mounted Only	√		√	√
Approvals, Complies with	AS/NZS60335.2.35, EMC BEAB, CE, BSI Kitemark		AS/NZS60335.2.35, EMC BEAB, CE, BSI Kitemark	BEAB, BEAB Care, RNIB, CE, BSI Kitemark
Warranty	2 years domestic		2 years domestic	2 years domestic