


# Xera

## Shower Mixer with Standard Faceplate

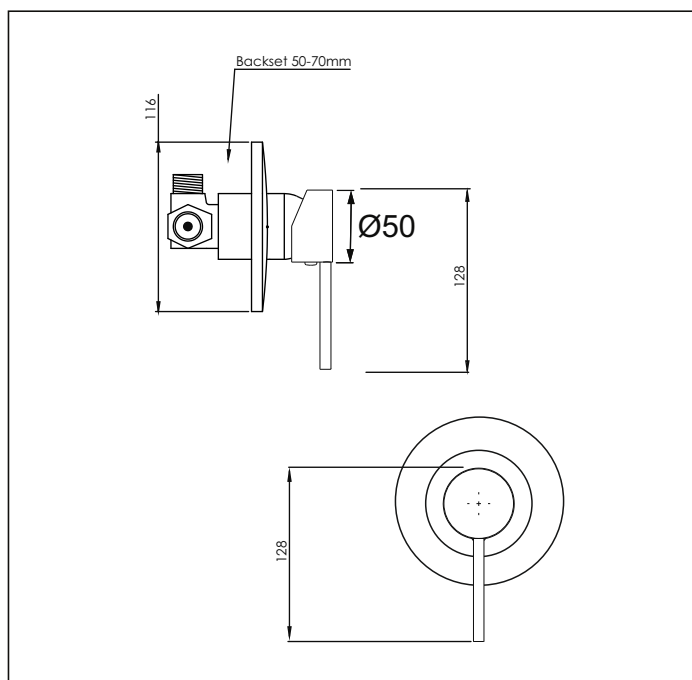

**Code: X1 SHM**

**Finish:** Chrome

**Faceplate Diameter:** 116mm

**Barrel Diameter:** 46mm

**Backset:** (Mounting board to front of lining)

Minimum: 50mm

Maximum: 70mm

**Installation Hole Diameter:**

Minimum: 47mm

Maximum: 105mm

**Water Inlets:** 1/2" BSP male

**Water Outlet:** 1/2" BSP male

**Cartridge:** Kerox 40mm Flat base High Flow

### Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

**No WELS rating required**

# aquatica



**KIWI OWNED COMPANY**

## NZ

• DESIGNED  
• ASSEMBLED  
• TESTED



### Aquatica NZ Limited

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: [info@aquatica.co.nz](mailto:info@aquatica.co.nz)

or visit our website:

[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019

**Please note:** Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation