


# Xera

## Gooseneck Sink Mixer with Water Filter

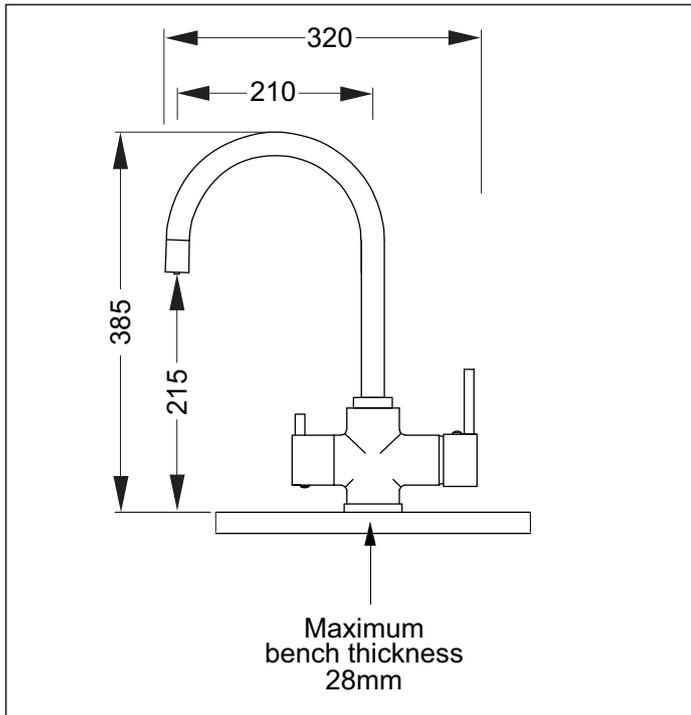

**Code: X1 SMWF**

**Finish:** Chrome

**Spout:** Swivel 360°

**Outlet:** Flow Guide or 8 ℓ/min PCA

**Stainless Steel Inlet Hoses:** Hot: Size: M16 x 1/2" BSP Length: 500mm

Cold: Size: M12 x 1/2" BSP Length: 500mm

Water Filter: Size: M10 x 1/4" for push lock fitting Length: 500mm

**Mounting:** Hardware: Studs: 1 x 8mm Nut: 11mm A/F Horseshoe Washer

Metal Base Ring supplied with O-ring seal Dia. 55mm

**Installation Hole Diameter:** Minimum: 38mm Maximum: 44mm

**Maximum Bench Thickness:** 28mm

**Cartridge:** Mondo 40K Plus Raised base

**Ceramic Mechanism:** Standard ceramic 180°

**Water Filter Cartridge:** KDF-GAC-30/1

**Filtration:** 1 µm @ 3-5 ℓ/min

**Capacity:** 30,000 litres uses Kinetic Degradation Fluxion (KDF) and Granular Activated Carbon (GAC for superior filtration)

**Note:** Mount at least 65mm away from wall to allow full travel of handle.

**Options:** Handle position can be moved from vertical to horizontal by changing cartridge to KX NKJ 40 B HWS

**Flow Control:** 8 ℓ/min PCA supplied for regulated flow with mains pressure system

Max hot @ 35 kPa = 5.3 ℓ/min

Suitable for both equal and unequal pressures, minimum 50 kPa.

Regulation must be used on the cold supply in unequal pressure systems

### Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 50 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED  
• ASSEMBLED  
• TESTED

**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: [info@aquatica.co.nz](mailto:info@aquatica.co.nz)

or visit our website:

[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019