
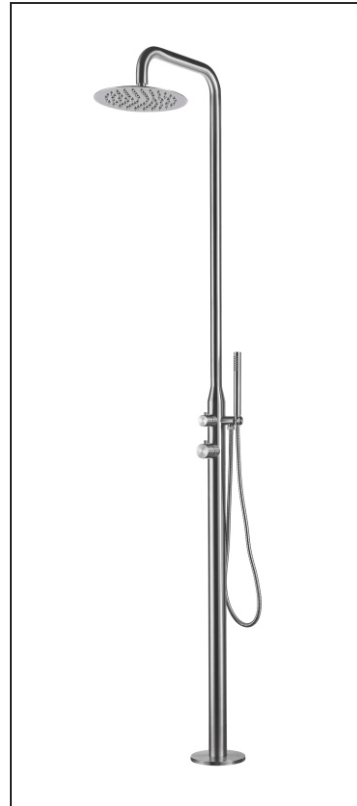


Outdoor Shower

Floor Mounted Outdoor Shower

aquatica

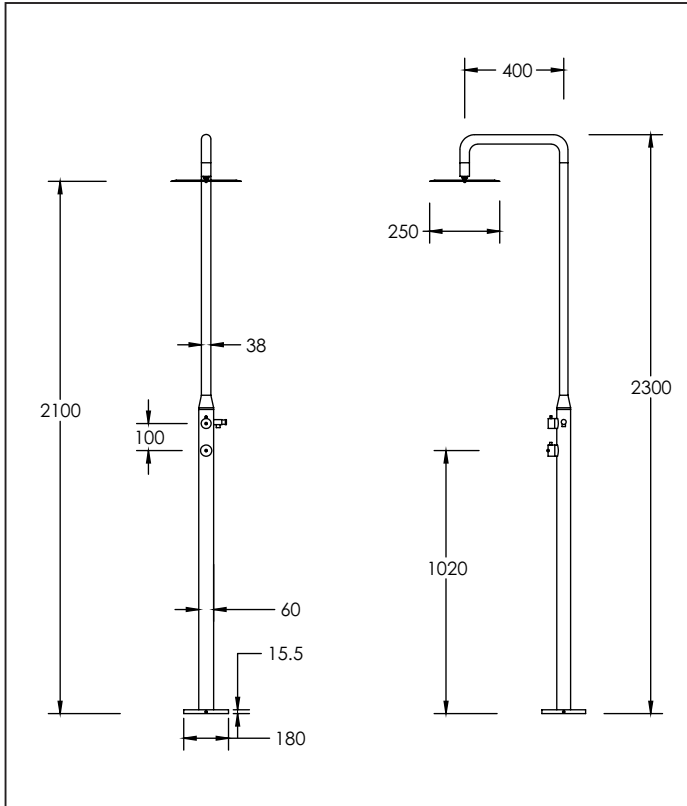

Code: OUT SHC FLOOR

Finish: 316 Stainless Steel

Water Outlet : **Rain Head:** 250mm Diameter
Replaceable nipples

Hand Shower: Single spray
Spray pattern @ Head = 45 x 15mm (Rectangle Pattern)
Spray pattern @ 500mm from Head = 90 x 45mm (Rectangle Pattern)

Hose: **Construction:** Stainless Steel Wide Bore
Length: 1.5m

Water Inlet : **Rain Head:** 1/2" BSP female thread
Hand Shower: 1/2" BSP Male thread
Connection Box: 1/2" BSP female

Divertor : Center = off
90 Degree Counter Clockwise = Rain Head
90 Degree Clockwise = Hand Shower
Note: Cannot have both outlets on together

Cartridge : 35mm Han-Yo

Installation Hole: 145mm x 145mm x 60mm depth minimum (Up to 75mm)
Note: Connection box must be installed with cold inlet on right side
and Hot inlet on left side

Flow Control: PCW 9's fitted in both Handshower and rainhead for regulated flow with
main pressure system

Features: Increased corrosion resistance over standard 304 stainless steel

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019