
Zento

Floor Standing Bath Filler & Hand Shower



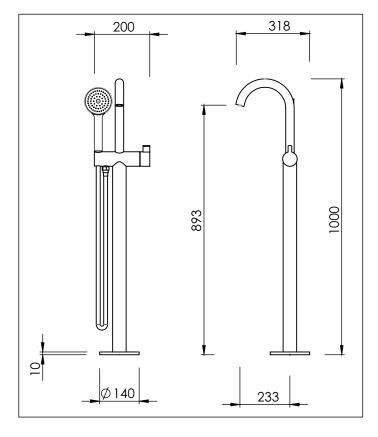

Code: ZN BSETFLOOR

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa

Finish: Chrome / Black Spout: Swivel 360° Water Outlet: M24 aerator on bath filler or handshower Water Inlets: 1/2" BSP female on mounting unit Handshower Head: Single spray chrome Handshower Hose: 1.5m PVC silver Mounting Hardware: Base bracket with 4 masonry bolts (to be mounted below finished floor level) Installation Hole: 120mm x 120mm x 50mm depth (minimum) Cover: 140mm diameter x 10mm (H) Reach: 233mm Height: 1000mm overall (893mm @ aerator) Divertor type: Clockwise to divert to bathfiller, Anticlockwise to divert to handshower Cartridge: Multi port divertor 40mm raised base Max hot water flow from bath filler: 3 ℓ/min @ 35kPa Max water flow from handshower: PCW 9 l/min (+-) 10% nominal flow from 100 kPa onwards Feature: Complete with double one way valve on handshower outlet



aquatica⁺



or visit our website:

www.aquatica.co.nz

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa © copyright Aquatica 2019 Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation