


# Energii

## Vessel Mixer

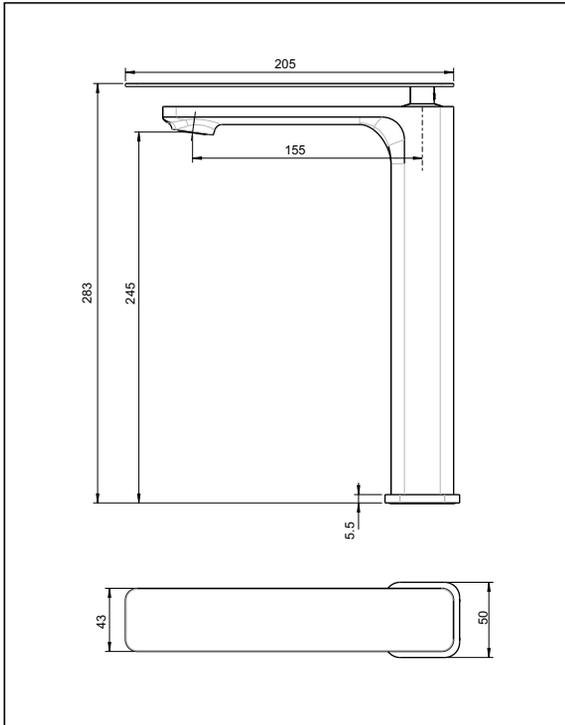

**Code: EII VM BN BLK**

**Finish:** Brushed Nickel - Matte Black / Matte Black / Chrome

**Spout:** Fixed

**Stainless Steel Inlet Hoses:**

Size: M10 x 1/2" BSP

Base Ring supplied with custom flat seal

**Water Outlet:** M24 ring with PCA fitted

**Mounting Hardware:**

32mm Brass tube and back nut

**Installation Hole Diameter:**

Minimum: 33mm

Maximum: 38mm

**Max Bench Thickness:** 38mm

**Cartridge:** Citec 35mm Raised base high O-ring

**Flow:** 7 l/min PCA fitted for regulated flow with mains pressure system

Max hot @ 35kPa = 4.7 l/min

aquatica



KIWI OWNED COMPANY

NZ

• DESIGNED  
• ASSEMBLED  
• TESTED



**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019



**Suitable for mains pressure only**

Recommended Operational Pressure Range: 150 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

*Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation*