


SOUND POWER LEVELS

Model No.	Sound Power Levels LwA (dB) Octave band centre frequency in Hz						
	125	250	500	1000	2000	4000	8000
MF100	50	56	58	58	52	47	37
MF125	52	59	60	60	56	49	41
MF150	58	66	65	63	62	54	46
MF200	65	69	64	63	62	60	48


TECHNICAL SPECIFICATION & PERFORMANCE DATA

Model No	Size (mm)	RPM	Watts	Maximum Airflow (m³/hr)	Maximum Pressure (Pa)	Lp dB(A) 3m*	IP Rating	Max Operating Temp °C
MF100	100	2300	40	250	180	40	X4	45
		1700	18	190	120	33		
MF125	125	2300	40	320	220	43	X4	45
		1700	18	260	160	36		
MF150	150	2700	70	597	300	47	X4	60
		2000	60	330	240	40		
MF200	200	2700	85	980	250	48	X4	60
		2350	60	860	140	45		
		2000	45	706	80	41		


* Lp dB(A) @ 3 metres - sound pressure based on the high speed for each fan.

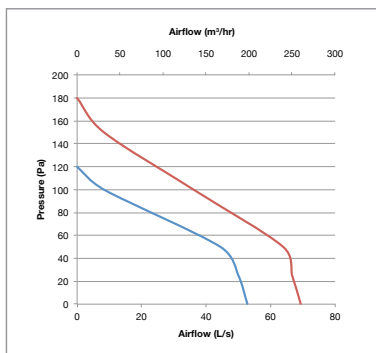


Performance - MF100

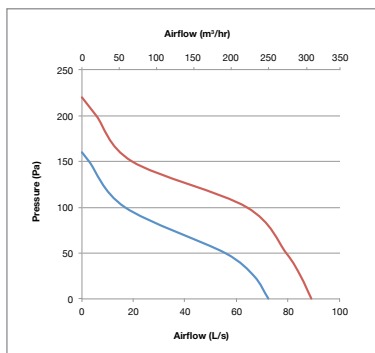

Performance - MF125

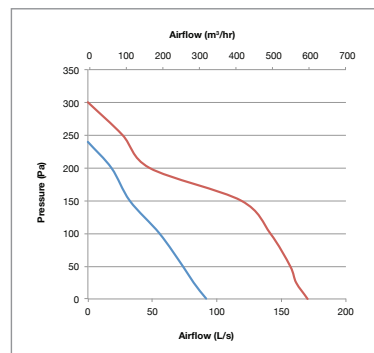

Performance - MF150

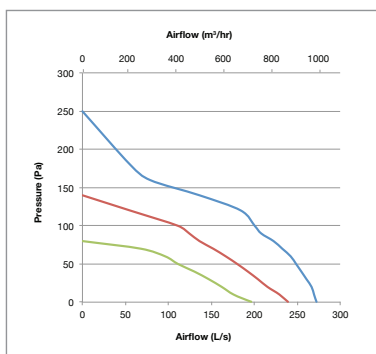

Icon Key

Speed 1 —
 Speed 2 —
 Speed 3 —

Performance - *MF200

*MF200 Timer model only has 2 speeds, therefore Medium fan speed specifications will not apply.